



精密行星齿轮减速机

AHS

伺服电机专用

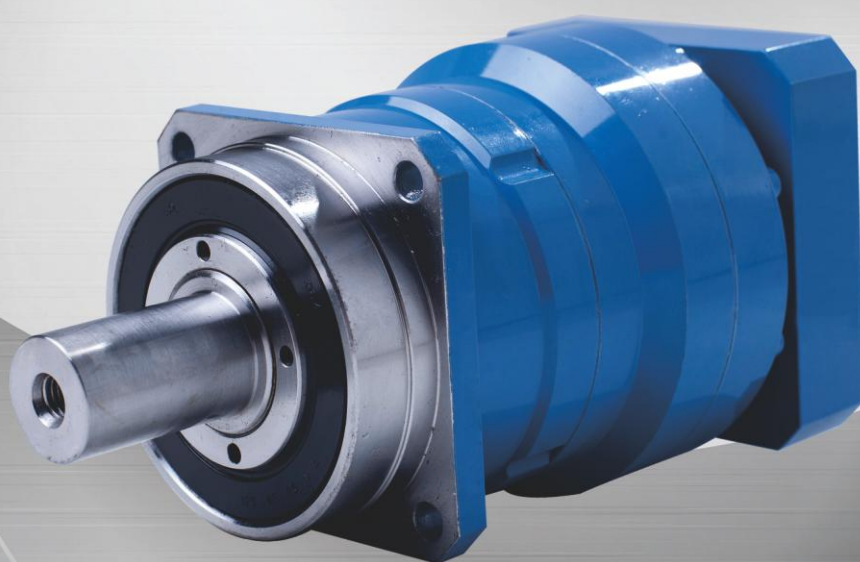

AHS series

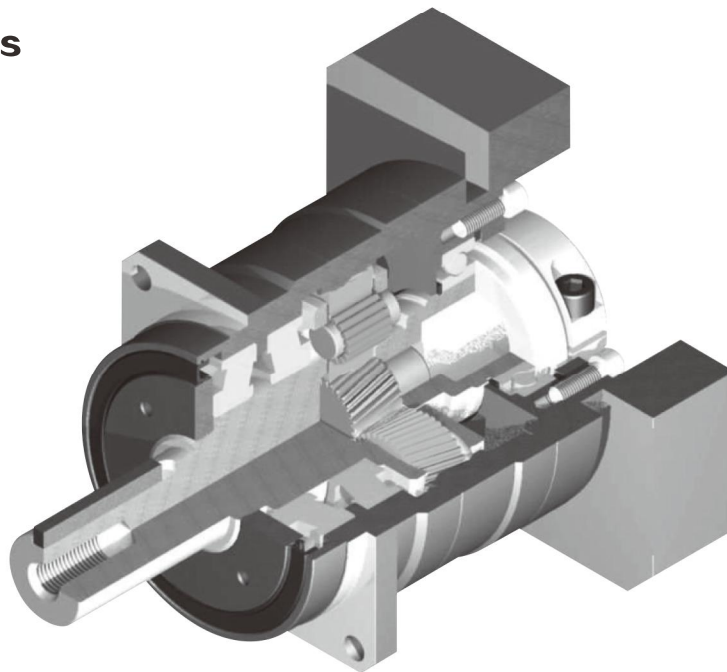**高精度**

齿隙低于3分、定位精确。

High precision

Standard backlash is 3 arc-min, ideal for precision control.

高刚性、高扭矩

使用整体式滚珠轴承, 大大提高了刚性和扭矩。

High rigidity & torque

High rigidity & high torque were achieved by uncaged needle roller bearings.

高负载

主轴承采用锥形滚柱轴承, 实现高负载容量。

High load

Adopting taper roller bearing for the main output shaft to increase radial and axial load.

连接法兰、轴套方式

电机通用性

Adapter-bushing connection

Motor generality

高粘度润滑脂

使用高粘度、不易分离的润滑脂, 有效防止润滑脂泄漏。

High viscosity grease

Perfect solution using high viscosity anti-separation grease.

维护方便


在产品寿命期内无需更换润滑脂, 安装更便捷。

Maintenance-free

No need to replace the grease for the life of the unit. Can be attached in any position.

AHS series

机种、型号代码 Model number

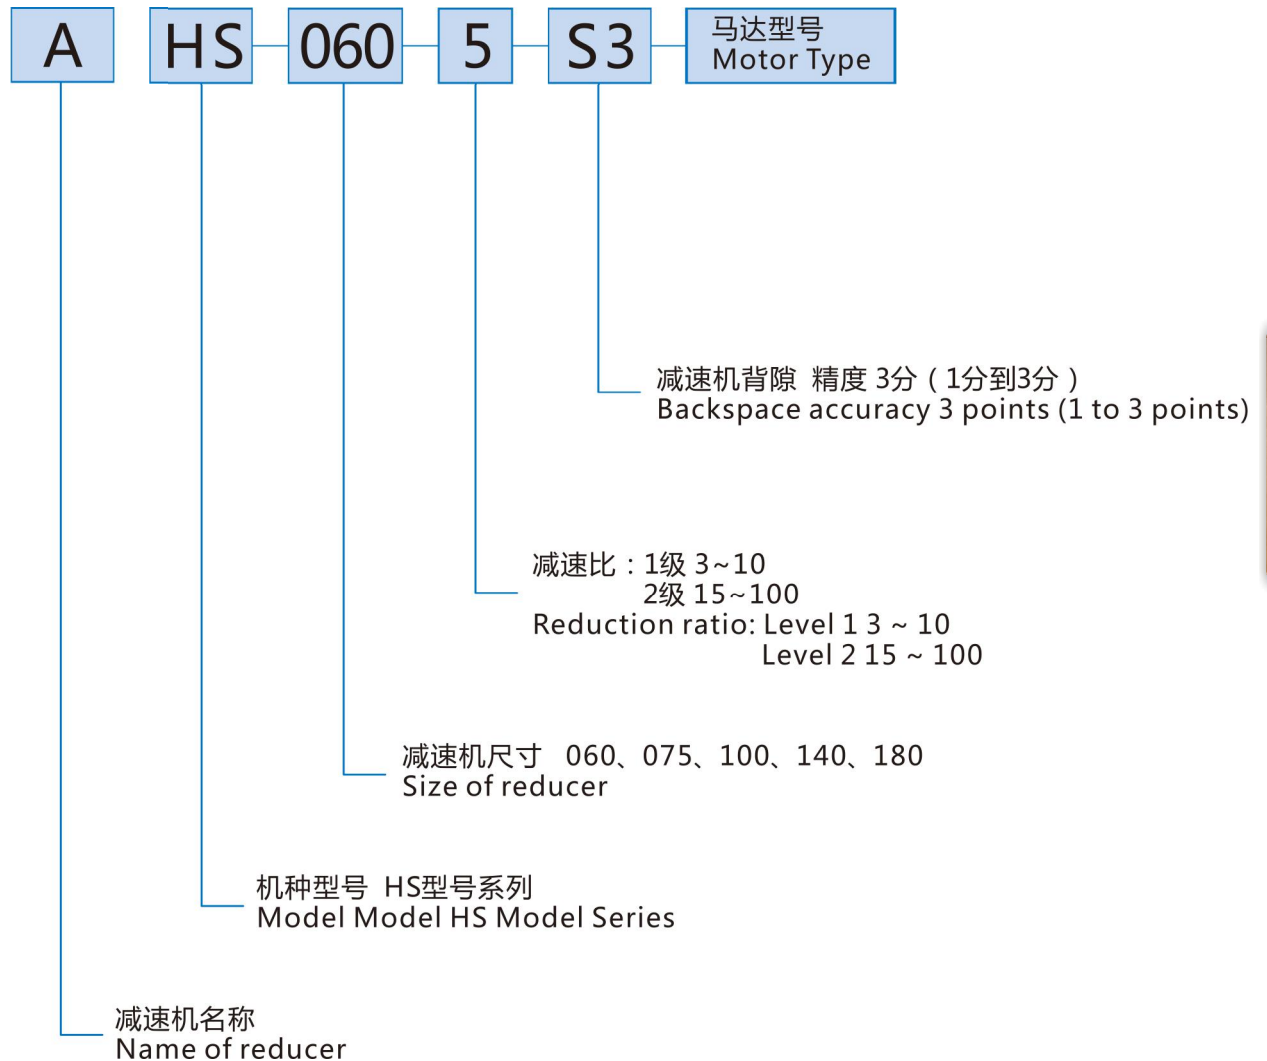

AHS-060

尺寸 Frame size	机种 Model	减速比 Ratio	①			②		③	
			额定扭矩 Nominal output torque [Nm]	最大扭矩 Maximum output torque [Nm]	急停 最大扭矩 Emergency stop torque [Nm]	额定 输入转速 Nominal input speed [rpm]	最大 输入转速 Maximum input speed [rpm]	额定径向力 Permitted radial load [N]	额定轴向力 Permitted axial load [N]
060	1级 Single	3	18	35	80	3000	6000	1700	2300
		4	27	50	100	3000	6000	1900	2500
		5	27	50	100	3000	6000	2000	2700
		6	27	50	100	3000	6000	2100	2700
		7	27	50	100	3000	6000	2200	2700
		8	27	50	100	3000	6000	2300	2700
		9	18	35	80	3000	6000	2400	2700
		10	18	35	80	3000	6000	2400	2700
	2级 Double	15	18	35	80	3000	6000	2800	2700
		16	27	50	100	3000	6000	2800	2700
		20	27	50	100	3000	6000	3000	2700
		25	27	50	100	3000	6000	3000	2700
		28	27	50	100	3000	6000	3000	2700
		30	18	35	80	3000	6000	3000	2700
		35	27	50	100	3000	6000	3000	2700
		40	27	50	100	3000	6000	3000	2700
		45	18	35	80	3000	6000	3000	2700
		50	27	50	100	3000	6000	3000	2700

尺寸 Frame size	机种 Model	减速比 Ratio	④		重量 Weight [kg]	⑤		⑥	
			最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]		惯性力矩 Moment of inertia ($\leq \phi 8$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 14$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 19$) [kgcm ²]	使用温度 Use the temperature
060	1级 Single	3	3000	2700	1.6	0.15	0.23	0.44	-20℃ ~ 175℃
		4	3000	2700		0.10	0.18	0.39	
		5	3000	2700		0.080	0.16	0.37	
		6	3000	2700		0.070	0.15	0.36	
		7	3000	2700		0.064	0.14	0.35	
		8	3000	2700		0.060	0.14	0.35	
		9	3000	2700		0.058	0.14	0.35	
		10	3000	2700		0.056	0.14	0.34	
	2级 Double	15	3000	2700	1.8	0.055	0.14	-	
		16	3000	2700		0.057	0.14	-	
		20	3000	2700		0.054	0.13	-	
		25	3000	2700		0.053	0.13	-	
		28	3000	2700		0.055	0.14	-	
		30	3000	2700		0.049	0.13	-	
		35	3000	2700		0.053	0.13	-	
		40	3000	2700		0.049	0.13	-	
		45	3000	2700		0.053	0.13	-	
		50	3000	2700		0.049	0.13	-	

- ① 输入转速为额定转速时，使用寿命为 20000 小时的值
- ② 输入转速为额定转速时，使用寿命为 20000 小时的值
(作用于轴中央，轴向负荷为 0 时)
- ③ 输入转速为额定转速时，使用寿命为 20000 小时的值
(作用于轴芯，径向负荷为 0 时)
- ④ 径向负荷的容许最大值
- ⑤ 轴向负荷的容许最大值
- ⑥ 使用温度 -20℃ ~ 175℃ (使用温度可根据用户要求定制)

- ① With nominal input speed, service life is 20,000 hours.
- ② With this load and nominal input speed, service life will be 20,000 hours.
(Applied to the output shaft center, at axial load 0)
- ③ With this load and nominal input speed, service life will be 20,000 hours.
(Applied to the output side bearing, at radial load 0)
- ④ The maximum radial load the reducer can accept.
- ⑤ The maximum axial load the reducer can accept.
- ⑥ Use the temperature - 20 °C ~ 175 °C
The use temperature can be customized according to user requirements.

AHS-075

尺寸 Frame size	机种 Model	减速比 Ratio	❶			❷		❸	
			额定扭矩 Nominal output torque [Nm]	最大扭矩 Maximum output torque [Nm]	急停 最大扭矩 Emergency stop torque [Nm]	额定 输入转速 Nominal input speed [rpm]	最大 输入转速 Maximum input speed [rpm]	额定径向力 Permitted radial load [N]	额定轴向力 Permitted axial load [N]
075	1级 Single	3	50	80	200	3000	6000	2300	3400
		4	75	125	250	3000	6000	2500	3700
		5	75	125	250	3000	6000	2700	3900
		6	75	125	250	3000	6000	2800	3900
		7	75	125	250	3000	6000	3000	3900
		8	75	125	250	3000	6000	3100	3900
		9	50	80	200	3000	6000	3200	3900
		10	50	80	200	3000	6000	3300	3900
	2级 Double	15	50	80	200	3000	6000	3700	3900
		16	75	125	250	3000	6000	3800	3900
		20	75	125	250	3000	6000	4000	3900
		25	75	125	250	3000	6000	4300	3900
		28	75	125	250	3000	6000	4300	3900
		30	50	80	200	3000	6000	4300	3900
		35	75	125	250	3000	6000	4300	3900
		40	75	125	250	3000	6000	4300	3900
		45	50	80	200	3000	6000	4300	3900
		50	75	125	250	3000	6000	4300	3900

尺寸 Frame size	机种 Model	减速比 Ratio	❹		重量 Weight [kg]	❺			
			最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]		惯性力矩 Moment of inertia ($\leq \phi 8$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 14$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 19$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 28$) [kgcm ²]
075	1级 Single	3	4300	3900	3.4	—	0.67	1.1	3.1
		4	4300	3900		—	0.47	0.93	2.9
		5	4300	3900		—	0.38	0.85	2.9
		6	4300	3900		—	0.34	0.81	2.8
		7	4300	3900		—	0.31	0.78	2.8
		8	4300	3900		—	0.30	0.76	2.8
		9	4300	3900		—	0.29	0.75	2.8
		10	4300	3900		—	0.29	0.75	2.8
	2级 Double	15	4300	3900	3.8	0.13	0.28	0.72	—
		16	4300	3900		0.14	0.30	0.73	—
		20	4300	3900		0.13	0.28	0.72	—
		25	4300	3900		0.12	0.28	0.71	—
		28	4300	3900		0.14	0.29	0.73	—
		30	4300	3900		0.099	0.25	0.70	—
		35	4300	3900		0.12	0.27	0.71	—
		40	4300	3900		0.098	0.25	0.69	—
		45	4300	3900		0.12	0.27	0.71	—
		50	4300	3900		0.098	0.25	0.69	—

- ❶ 输入转速为额定转速时，使用寿命为 20000 小时的值
 ❷ 输入转速为额定转速时，使用寿命为 20000 小时的值
 （作用于轴中央，轴向负荷为 0 时）
 ❸ 输入转速为额定转速时，使用寿命为 20000 小时的值
 （作用于轴芯，径向负荷为 0 时）
 ❹ 径向负荷的容许最大值
 ❺ 轴向负荷的容许最大值
 注：使用温度 -20℃ ~ 175℃（使用温度可根据用户要求定制）

- ❶ With nominal input speed, service life is 20,000 hours.
 ❷ With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output shaft center, at axial load 0)
 ❸ With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output side bearing, at radial load 0)
 ❹ The maximum radial load the reducer can accept.
 ❺ The maximum axial load the reducer can accept.
 Note: Use the temperature - 20 °C ~ 175 °C
 The use temperature can be customized according to user requirements.

AHS-100

尺寸 Frame size	机种 Model	减速比 Ratio	①			②		③	
			额定扭矩 Nominal output torque [Nm]	最大扭矩 Maximum output torque [Nm]	急停 最大扭矩 Emergency stop torque [Nm]	额定 输入转速 Nominal input speed [rpm]	最大 输入转速 Maximum input speed [rpm]	额定径向力 Permitted radial load [N]	额定轴向力 Permitted axial load [N]
100	1级 Single	3	120	225	500	3000	6000	3400	4800
		4	120	330	625	3000	6000	3700	5200
		5	180	330	625	3000	6000	4000	5600
		6	180	330	625	3000	6000	4200	5900
		7	180	330	625	3000	6000	4400	6100
		8	180	330	625	3000	6000	4600	6300
		9	120	225	500	3000	6000	4800	6300
		10	120	225	500	3000	6000	4900	6300
	2级 Double	15	120	225	500	3000	6000	5600	6300
		16	180	330	625	3000	6000	5700	6300
		20	180	330	625	3000	6000	6100	6300
		25	180	330	625	3000	6000	6500	6300
		28	180	330	625	3000	6000	6700	6300
		30	120	225	500	3000	6000	6900	6300
		35	180	330	625	3000	6000	7000	6300
		40	180	330	625	3000	6000	7000	6300
		45	120	225	500	3000	6000	7000	6300
		50	180	330	625	3000	6000	7000	6300

尺寸 Frame size	机种 Model	减速比 Ratio	④		重量 Weight [kg]	⑤		惯性力矩 Moment of inertia ($\leq \phi 14$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 19$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 28$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 38$) [kgcm ²]
			最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]		最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]				
100	1级 Single	3	7000	6300	8.1	-	3.2	5.2	13		
		4	7000	6300		-	2.0	4.0	12		
		5	7000	6300		-	1.5	3.6	11		
		6	7000	6300		-	1.3	3.3	11		
		7	7000	6300		-	1.1	3.1	11		
		8	7000	6300		-	1.0	3.0	11		
		9	7000	6300		-	0.96	3.0	11		
		10	7000	6300		-	0.93	3.0	11		
	2级 Double	15	7000	6300	8.8	0.42	0.86	2.8	-		
		16	7000	6300		0.48	0.91	2.9	-		
		20	7000	6300		0.40	0.83	2.8	-		
		25	7000	6300		0.38	0.82	2.8	-		
		28	7000	6300		0.44	0.87	2.8	-		
		30	7000	6300		0.29	0.74	2.7	-		
		35	7000	6300		0.37	0.81	2.7	-		
		40	7000	6300		0.28	0.73	2.7	-		
		45	7000	6300		0.37	0.80	2.7	-		
		50	7000	6300		0.28	0.73	2.7	-		

- ① 输入转速为额定转速时，使用寿命为 20000 小时的值
 ② 输入转速为额定转速时，使用寿命为 20000 小时的值
 (作用于轴中央，轴向负荷为 0 时)
 ③ 输入转速为额定转速时，使用寿命为 20000 小时的值
 (作用于轴芯，径向负荷为 0 时)
 ④ 径向负荷的容许最大值
 ⑤ 轴向负荷的容许最大值
 注：使用温度 -20℃ ~ 175℃ (使用温度可根据用户要求定制)

- ① With nominal input speed, service life is 20,000 hours.
 ② With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output shaft center, at axial load 0)
 ③ With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output side bearing, at radial load 0)
 ④ The maximum radial load the reducer can accept.
 ⑤ The maximum axial load the reducer can accept.
 Note: Use the temperature - 20 °C ~ 175 °C
 The use temperature can be customized according to user requirements.

AHS-140

尺寸 Frame size	机种 Model	减速比 Ratio	①			②		③	
			额定扭矩 Nominal output torque [Nm]	最大扭矩 Maximum output torque [Nm]	急停 最大扭矩 Emergency stop torque [Nm]	额定 输入转速 Nominal input speed [rpm]	最大 输入转速 Maximum input speed [rpm]	额定径向力 Permitted radial load [N]	额定轴向力 Permitted axial load [N]
140	1级 Single	3	240	470	1000	2000	4000	6700	9000
		4	240	700	1250	2000	4000	7400	9000
		5	360	700	1250	2000	4000	7900	9000
		6	360	700	1250	2000	4000	8300	9000
		7	360	700	1250	2000	4000	8700	9000
		8	360	700	1250	2000	4000	9100	9000
		9	240	470	1000	2000	4000	9400	9000
		10	240	470	1000	2000	4000	9700	9000
	2级 Double	15	240	470	1000	2000	4000	10000	9000
		16	360	700	1250	2000	4000	10000	9000
		20	360	700	1250	2000	4000	10000	9000
		25	360	700	1250	2000	4000	10000	9000
		28	360	700	1250	2000	4000	10000	9000
		30	240	470	1000	2000	4000	10000	9000
		35	360	700	1250	2000	4000	10000	9000
		40	360	700	1250	2000	4000	10000	9000
		45	240	470	1000	2000	4000	10000	9000
		50	360	700	1250	2000	4000	10000	9000

尺寸 Frame size	机种 Model	减速比 Ratio	④		重量 Weight [kg]	⑤			
			最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]		惯性力矩 Moment of inertia ($\leq \phi 19$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 28$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 38$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 48$) [kgcm ²]
140	1级 Single	3	10000	9000	17	-	12	20	42
		4	10000	9000		-	7.4	15	37
		5	10000	9000		-	5.8	13	36
		6	10000	9000		-	4.9	13	35
		7	10000	9000		-	4.1	12	34
		8	10000	9000		-	3.8	12	34
		9	10000	9000		-	3.6	11	34
		10	10000	9000		-	3.4	11	33
	2级 Double	15	10000	9000	19	1.3	3.2	11	-
		16	10000	9000		1.5	3.5	11	-
		20	10000	9000		1.2	3.1	11	-
		25	10000	9000		1.1	3.1	11	-
		28	10000	9000		1.4	3.3	11	-
		30	10000	9000		0.85	2.8	10	-
		35	10000	9000		1.1	3.1	11	-
		40	10000	9000		0.83	2.8	10	-
		45	10000	9000		1.1	3.0	11	-
		50	10000	9000		0.81	2.8	10	-

- ① 输入转速为额定转速时, 使用寿命为 20000 小时的值
 ② 输入转速为额定转速时, 使用寿命为 20000 小时的值
 (作用于轴中央, 轴向负荷为 0 时)
 ③ 输入转速为额定转速时, 使用寿命为 20000 小时的值
 (作用于轴芯, 径向负荷为 0 时)
 ④ 径向负荷的容许最大值
 ⑤ 轴向负荷的容许最大值
 注: 使用温度 -20℃ ~ 175℃ (使用温度可根据用户要求定制)

- ① With nominal input speed, service life is 20,000 hours.
 ② With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output shaft center, at axial load 0)
 ③ With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output side bearing, at radial load 0)
 ④ The maximum radial load the reducer can accept.
 ⑤ The maximum axial load the reducer can accept.
 Note: Use the temperature - 20 °C ~ 175 °C
 The use temperature can be customized according to user requirements.

AHS-180

尺寸 Frame size	机种 Model	减速比 Ratio	①			②		③	
			额定扭矩 Nominal output torque [Nm]	最大扭矩 Maximum output torque [Nm]	急停 最大扭矩 Emergency stop torque [Nm]	额定 输入转速 Nominal input speed [rpm]	最大 输入转速 Maximum input speed [rpm]	额定径向力 Permitted radial load [N]	额定轴向力 Permitted axial load [N]
180	1级 Single	3	500	970	2200	1500	3000	12000	16000
		4	750	1400	2750	1500	3000	13000	17000
		5	750	1400	2750	1500	3000	14000	17000
		6	750	1400	2750	1500	3000	15000	17000
		7	750	1400	2750	1500	3000	16000	17000
		8	750	1400	2750	1500	3000	17000	17000
		9	500	970	2200	1500	3000	17000	17000
		10	500	970	2200	1500	3000	18000	17000
		15	500	970	2200	1500	3000	19000	17000
		16	750	1400	2750	1500	3000	19000	17000
	2级 Double	20	750	1400	2750	1500	3000	19000	17000
		25	750	1400	2750	1500	3000	19000	17000
		28	750	1400	2750	1500	3000	19000	17000
		30	500	970	2200	1500	3000	19000	17000
		35	750	1400	2750	1500	3000	19000	17000
		40	750	1400	2750	1500	3000	19000	17000
		45	500	970	2200	1500	3000	19000	17000
		50	750	1400	2750	1500	3000	19000	17000
		60	750	1400	2750	1500	3000	19000	17000
		70	750	1400	2750	1500	3000	19000	17000
		80	750	1400	2750	1500	3000	19000	17000
		90	500	970	2200	1500	3000	19000	17000
		100	500	970	2200	1500	3000	19000	17000


尺寸 Frame size	机种 Model	减速比 Ratio	④		重量 Weight [kg]	⑤			
			最大 径向负荷 Maximum radial load [N]	最大 轴向负荷 Maximum axial load [N]		惯性力矩 Moment of inertia ($\leq \phi 28$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 38$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 48$) [kgcm ²]	惯性力矩 Moment of inertia ($\leq \phi 65$) [kgcm ²]
180	1级 Single	3	19000	17000	39	—	42	64	120
		4	19000	17000		—	27	49	110
		5	19000	17000		—	21	43	100
		6	19000	17000		—	18	40	100
		7	19000	17000		—	16	38	98
		8	19000	17000		—	15	37	97
		9	19000	17000		—	14	36	96
		10	19000	17000		—	14	36	96
	2级 Double	15	19000	17000	39	4.7	12	34	—
		16	19000	17000		5.4	13	35	—
		20	19000	17000		4.3	12	34	—
		25	19000	17000		4.2	12	34	—
		28	19000	17000		4.9	13	35	—
		30	19000	17000		3.2	11	33	—
		35	19000	17000		4.1	12	34	—
		40	19000	17000		3.2	11	33	—
		45	19000	17000		4.0	12	34	—
		50	19000	17000		3.1	11	33	—
		60	19000	17000		3.1	11	33	—
		70	19000	17000		3.1	11	33	—
		80	19000	17000		3.1	11	33	—
		90	19000	17000		3.1	11	33	—
		100	19000	17000		3.1	11	33	—

- ① 输入转速为额定转速时，使用寿命为 20000 小时的值
 ② 输入转速为额定转速时，使用寿命为 20000 小时的值
 （作用于轴中央，轴向负荷为 0 时）
 ③ 输入转速为额定转速时，使用寿命为 20000 小时的值
 （作用于轴芯，径向负荷为 0 时）
 ④ 径向负荷的容许最大值
 ⑤ 轴向负荷的容许最大值
 注：使用温度 -20℃ ~ 175℃（使用温度可根据用户要求定制）


- ① With nominal input speed, service life is 20,000 hours.
 ② With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output shaft center, at axial load 0)
 ③ With this load and nominal input speed, service life will be 20,000 hours.
 (Applied to the output side bearing, at radial load 0)
 ④ The maximum radial load the reducer can accept.
 ⑤ The maximum axial load the reducer can accept.
 Note: Use the temperature - 20 °C ~ 175 °C
 The use temperature can be customized according to user requirements.

AHS-060 1级 1stage



输入轴内径 Input shaft bore $\leq \phi 8$

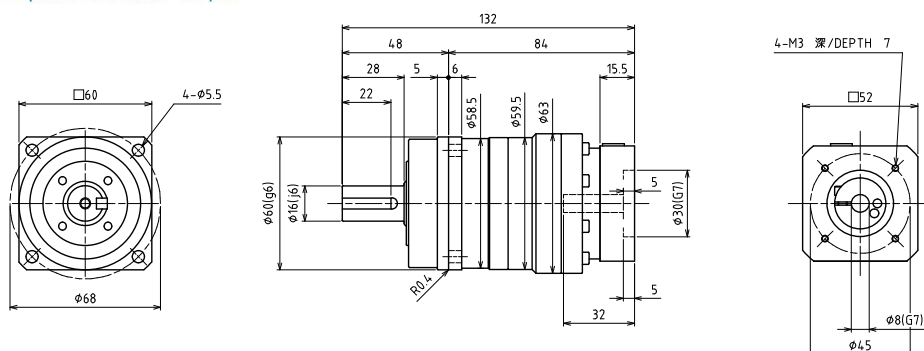

输入轴内径 Input shaft bore $\leq \phi 14$

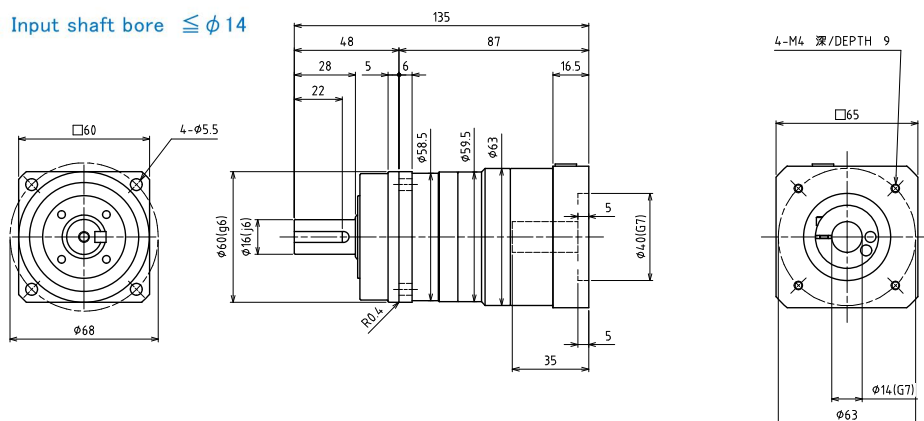


输入轴内径 Input shaft bore $\leq \phi 19$

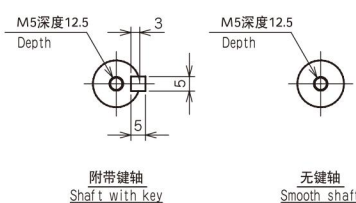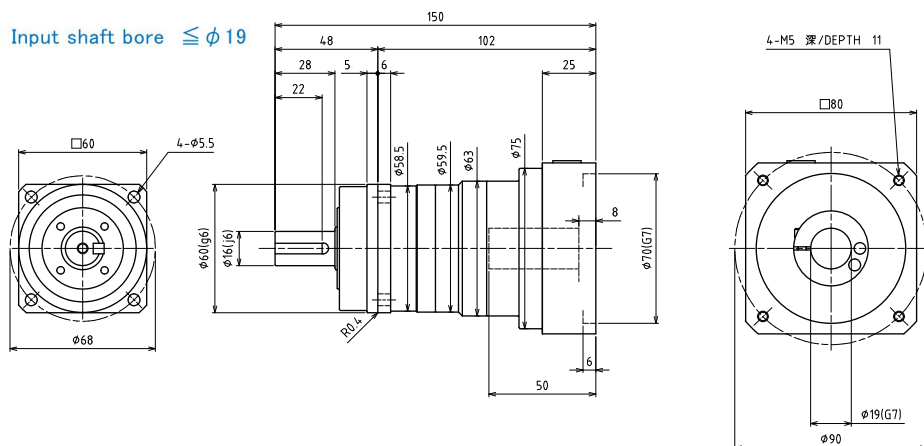



备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.

AHS-060 2级 2stage

输入轴内径 Input shaft bore $\leq \phi 8$

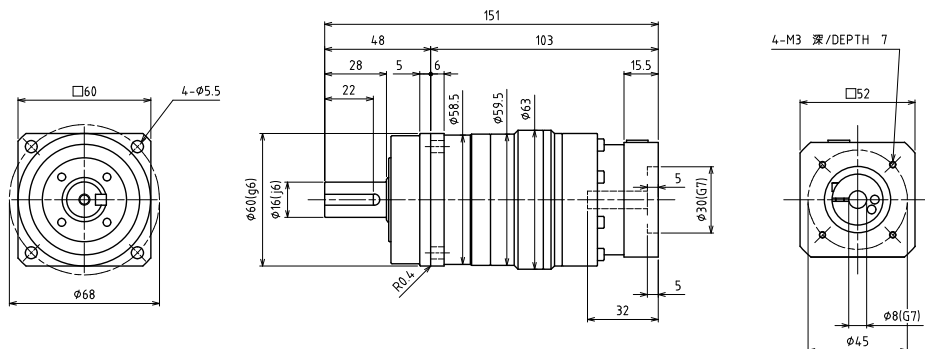

输入轴内径 Input shaft bore $\leq \phi 14$

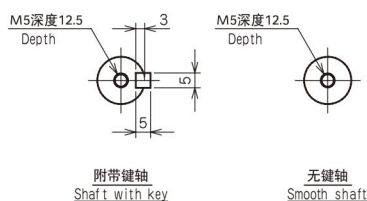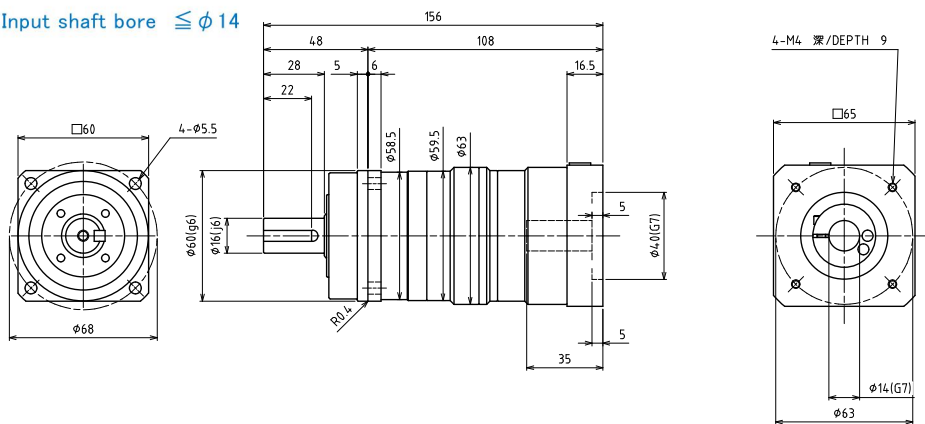

附带键轴
Shaft with key

无键轴
Smooth shaft

备注1: 机身尺寸随安装电机的不同而有所差异。


备注2: 电机轴径与输入轴径不同时, 可插入轴套。

Note1: Body Size Length will vary depending on motor.


Note2: Bushing will be inserted to adapt to motor shaft.

AHS-075 1级 1stage



输入轴内径 Input shaft bore $\leq \phi 14$

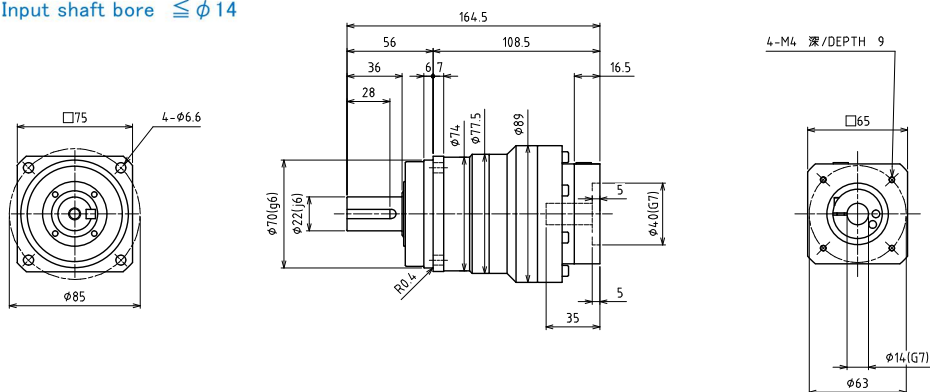

输入轴内径 Input shaft bore $\leq \phi 19$

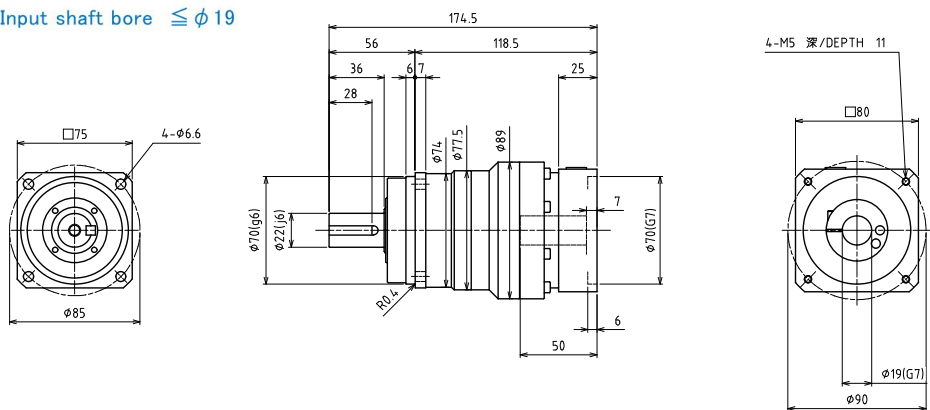


输入轴内径 Input shaft bore $\leq \phi 28$

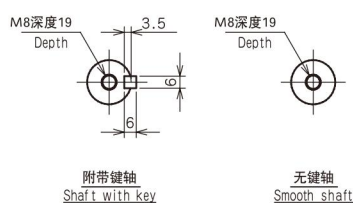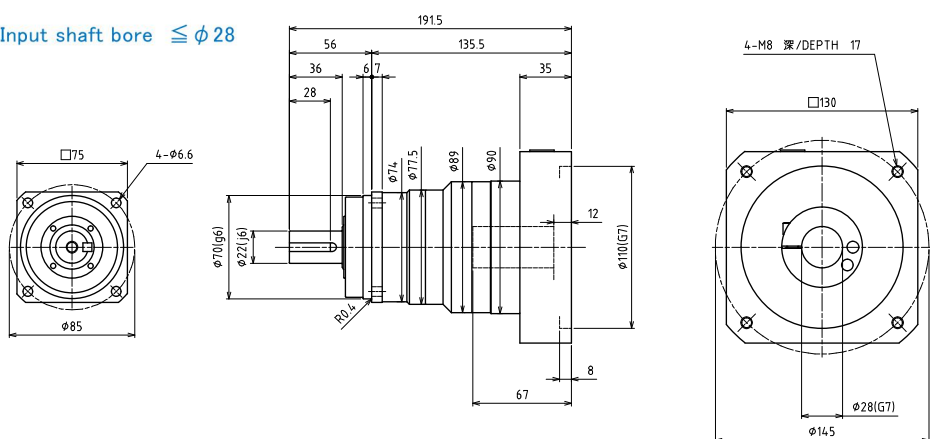


备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.

AHS-075 2級 2stage



输入轴内径 Input shaft bore $\leq \phi 8$

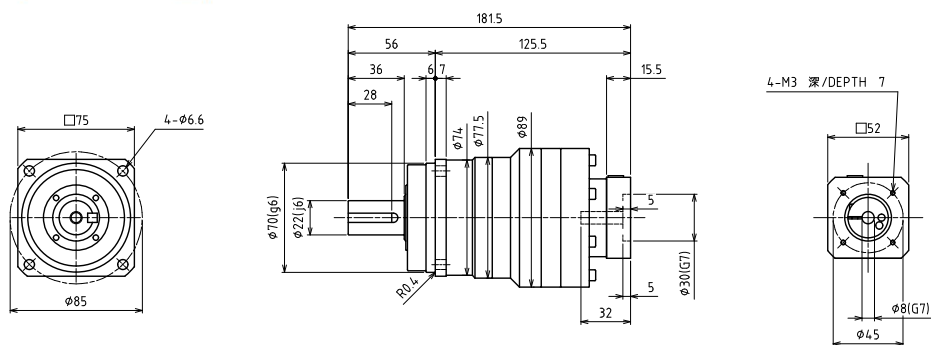

输入轴内径 Input shaft bore $\leq \phi 14$

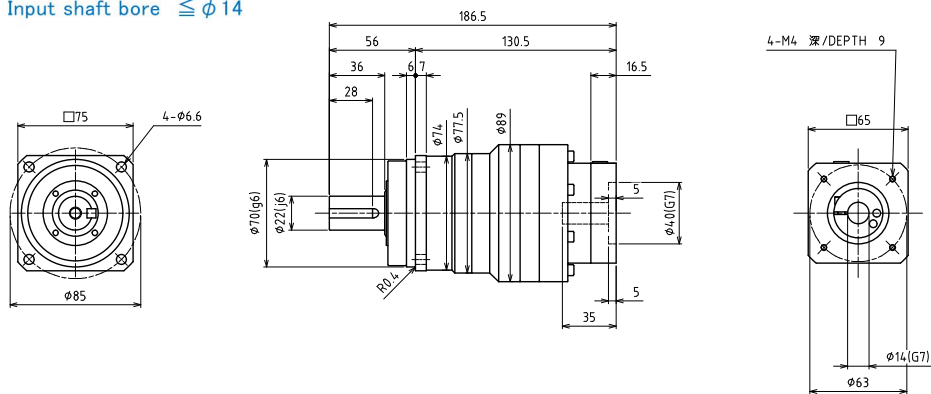

输入轴内径 Input shaft bore $\leq \phi 19$

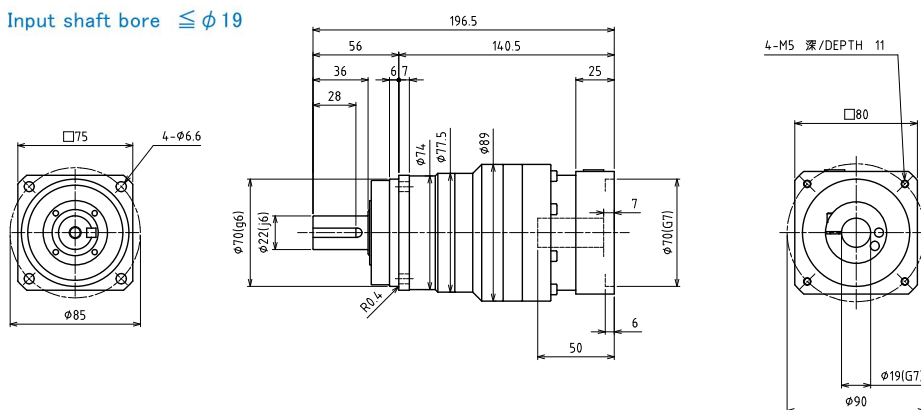

备注1: 机身尺寸随安装电机的不同而有所差异。


备注2: 电机轴径与输入轴径不同时, 可插入轴套。

Note1: Body Size Length will vary depending on motor.


Note1: Body Size Length will vary depending on motor.
Note2: Bushing will be inserted to adapt to motor shaft.

AHS-100 1级 1stage



输入轴内径 Input shaft bore $\leq \phi 19$

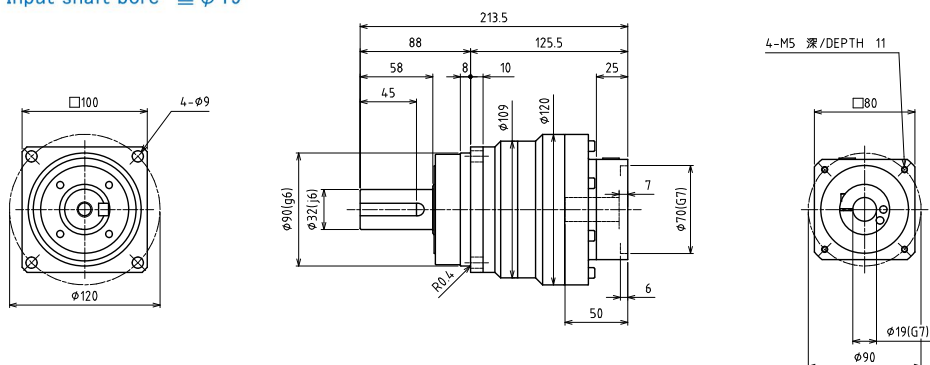

输入轴内径 Input shaft bore $\leq \phi 28$

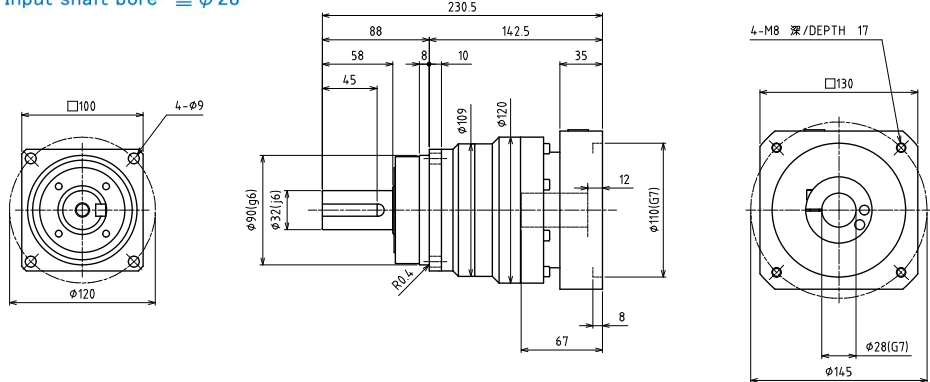


输入轴内径 Input shaft bore $\leq \phi 38$

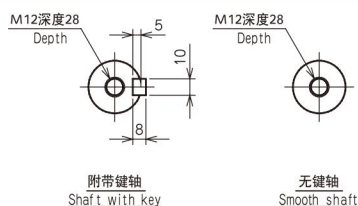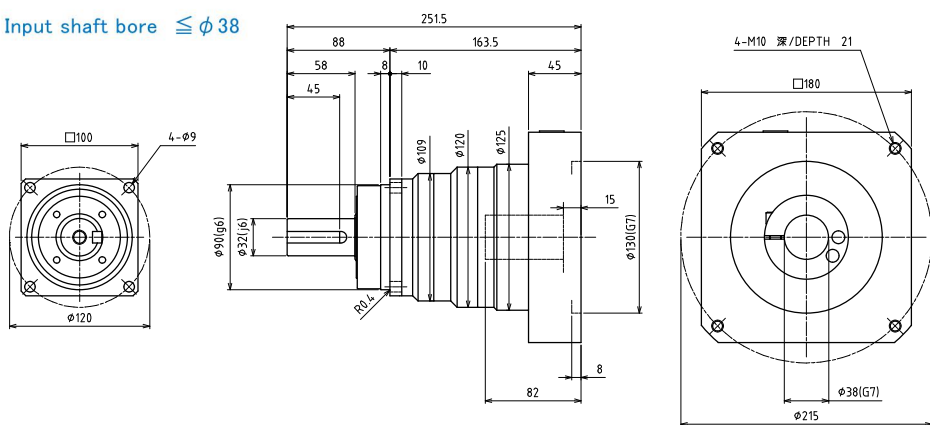


备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.

AHS-100 2级 2stage



输入轴内径 Input shaft bore $\leq \phi 14$

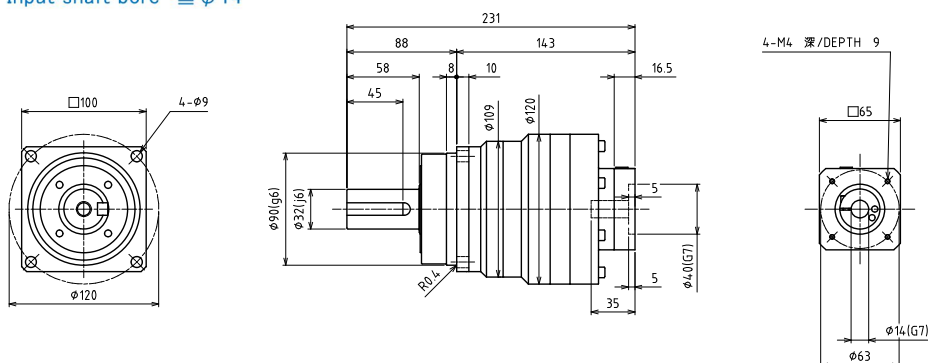

输入轴内径 Input shaft bore $\leq \phi 19$

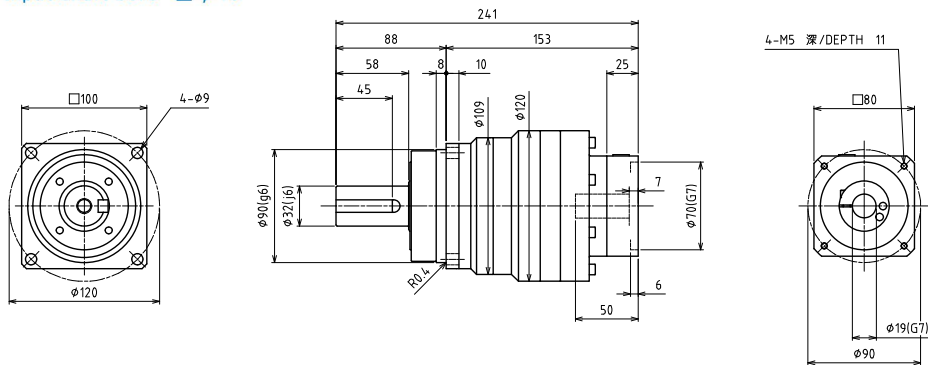


输入轴内径 Input shaft bore $\leq \phi 28$

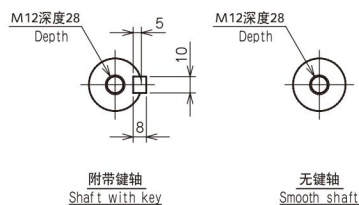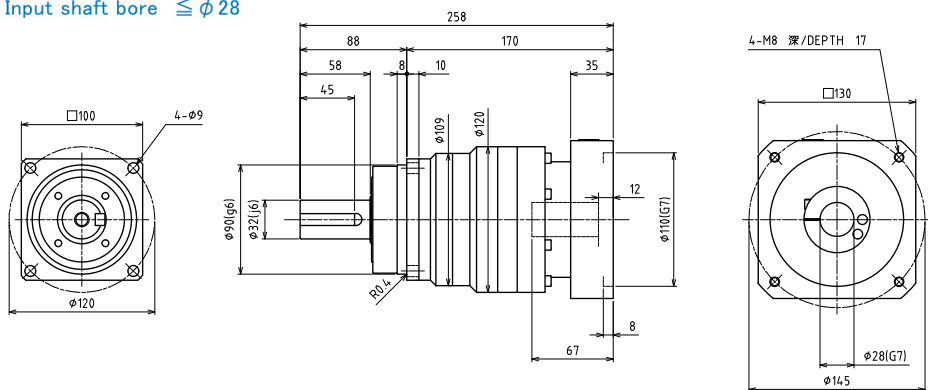


备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.

AHS-140 1级 1stage



输入轴内径 Input shaft bore $\leq \phi 28$

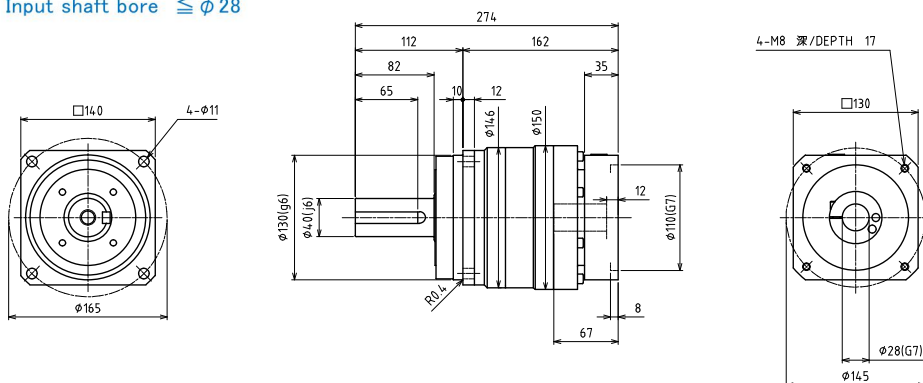

输入轴内径 Input shaft bore $\leq \phi 38$

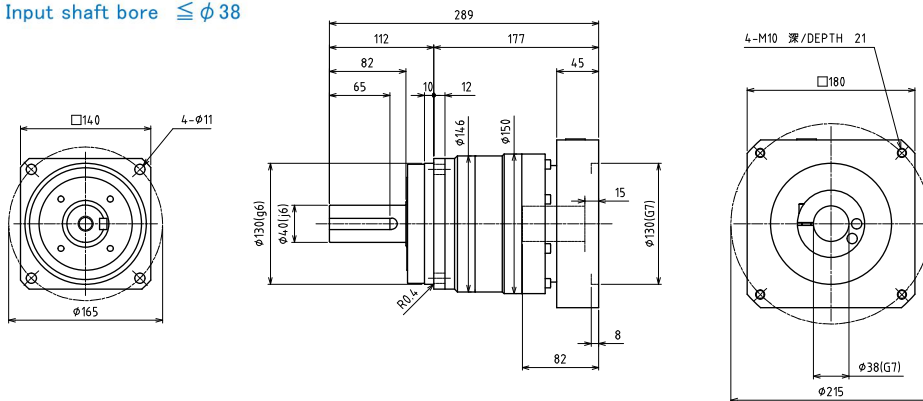


输入轴内径 Input shaft bore $\leq \phi 48$

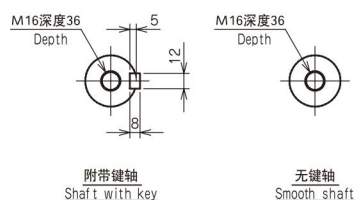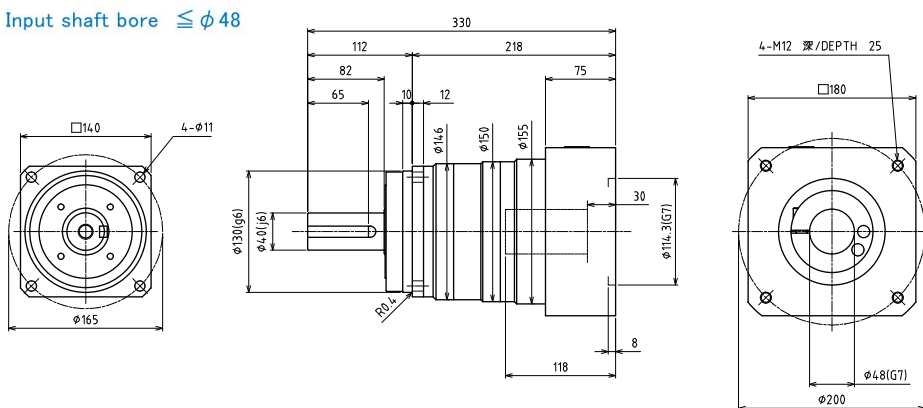


备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.

AHS-140 2级 2stage



输入轴内径 Input shaft bore $\leq \phi 19$

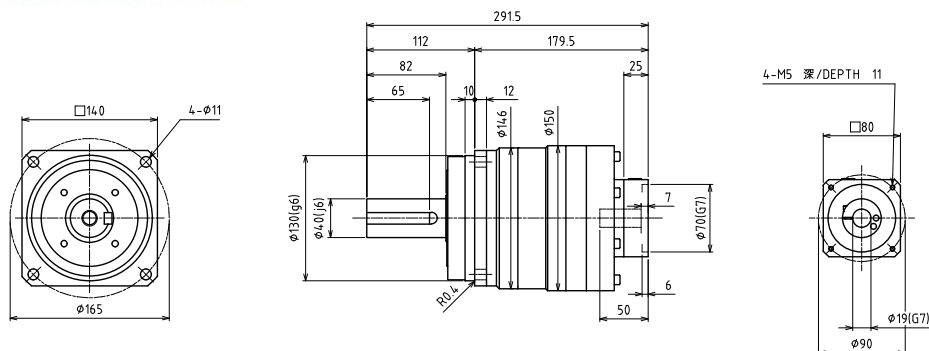

输入轴内径 Input shaft bore $\leq \phi 28$

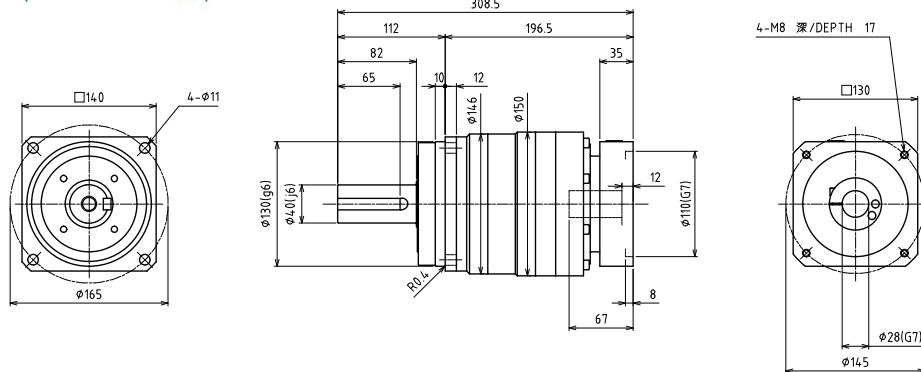

输入轴内径 Input shaft bore $\leq \phi 38$

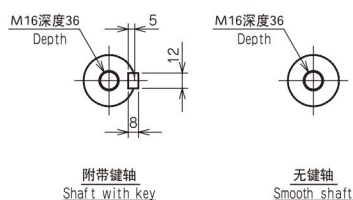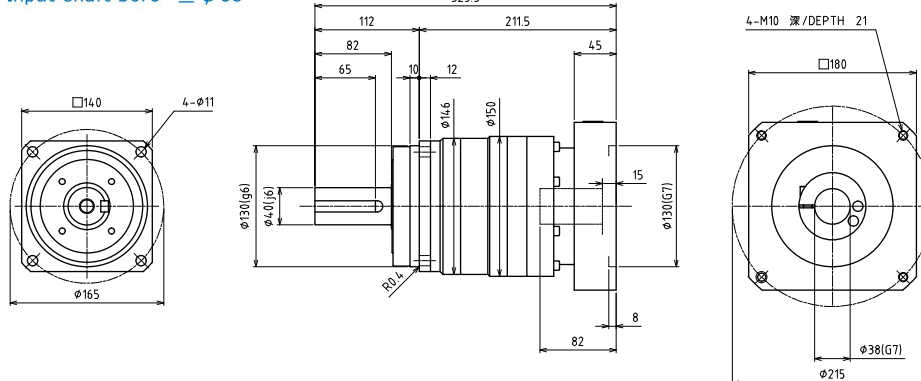

备注1: 机身尺寸随安装电机的不同而有所差异。
 备注2: 电机轴径与输入轴径不同时, 可插入轴套。
 Note1: Body Size Length will vary depending on motor.
 Note2: Bushing will be inserted to adapt to motor shaft.