



特点：

- NEMA 56C安装法兰
- H级变频绕组—F级引线
- 115/230V额定电压用于单相，230/460V用于三相，面对出线端逆时针
- 螺纹轴由303不锈钢制成



Features：

- NEMA 56C face mounting flange
- Class H inverter winding - Class F leads
- 115/230V rated for single & 230/460V for three phase CCW facing lead end
- Threaded shafts made of 303 SST





型号	功率	转速	机座	电压	满负荷电流	过载保护	绝缘等级	过载系数	防护等级	工作制	重量
REF. NO.	HP	RPM	FRAME	VOLTAGE	230V FLA	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	WGT LB/KG
YC4822D-J1H	0.50	3600	S56J	115/208-230	4	AUTO.	F	1.6	20	CONT.	19/8.3
YS4812D-J1H	0.50	3600	S56J	208-230/460	0.7	NONE	F	1.6	20	CONT.	18/8.1
YC4852D-J1H	0.75	3600	S56J	1 15/208-230	4.5	AUTO.	F	1.5	20	CONT.	24/10.9
YS4832D-J1H	0.75	3600	S56J	208-230/460	1.1	NONE	F	1.5	20	CONT.	28/12.7
YC4862D-J1H	1.0	3600	S56J	1 1 5/208-230	5.9	AUTO.	F	1.4	20	CONT.	31/14.1
YS4852D-J1H	1.0	3600	S56J	208-230/460	1.5	NONE	F	1.4	20	CONT.	33/15.0
YCN5652D-J1H	1.5	3600	56J	115/208-230	8.2	AUTO.	F	1.3	20	CONT.	32/14.5
YSN5642D-J1H	1.5	3600	56J	208-230/460	2	NONE	F	1.3	20	CONT.	30/13.6
YCYN5672D-J1H	2.0	3600	56J	1 1 5/208-230	8.6	AUTO.	F	1.2	20	CONT.	40/18.2
YSN5652D-J1H	2.0	3600	56J	208-230/460	2.6	NONE	F	1.2	20	CONT.	35/15.9
YCYN5692D-J1H	3.0	3600	56J	230	11.8	AUTO.	F	1.15	20	CONT.	49/22.2
YSN5682D-J1H	3.0	3600	56J	208-230/460	3.8	NONE	F	1.15	20	CONT.	42/19.1

外形和尺寸 LAYOUT & DIMENSIONS

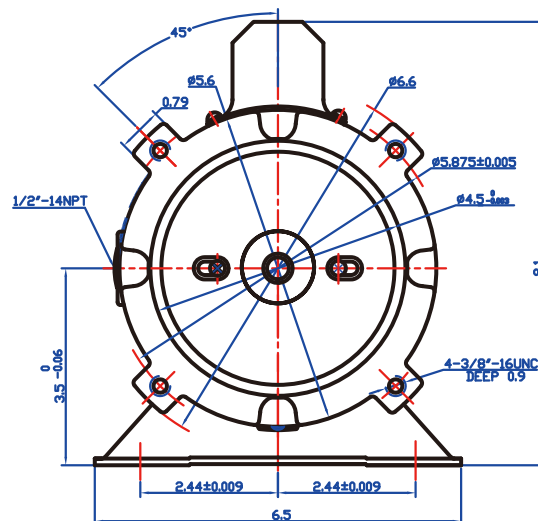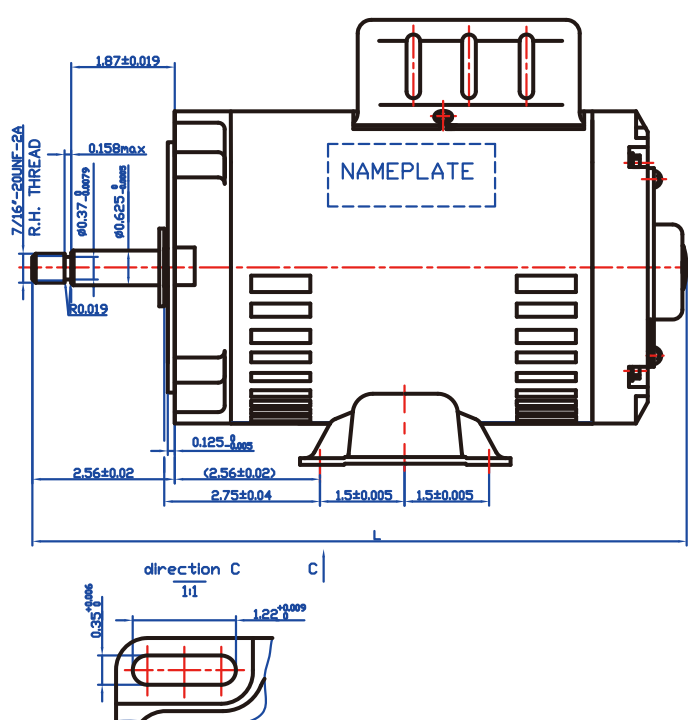


GW REF.NO.	HP	FRAME	RPM	VOLTAGE	Hz	FLA (230V)	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	L
YC4822D-J1H	1/2	S56J	3600	115/208-230	60	4	AUTO	F	1.6	20	CONT.	12.5
YC4852D-J1H	3/4	S56J	3600	115/208-230	60	4.5	AUTO	F	1.5	20	CONT.	13.3
YC4862D-J1H	1	S56J	3600	115/208-230	60	5.9	AUTO	F	1.4	20	CONT.	13.8

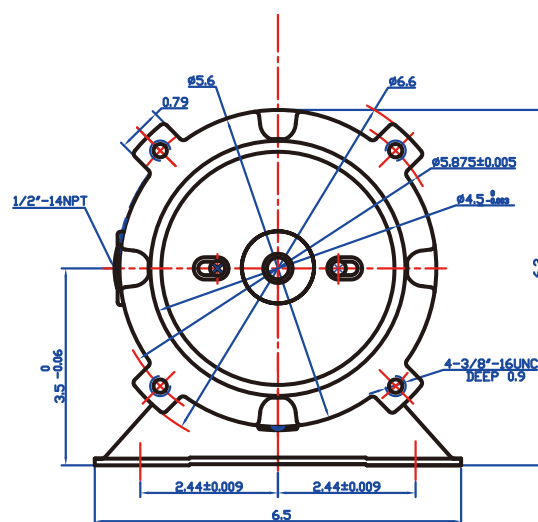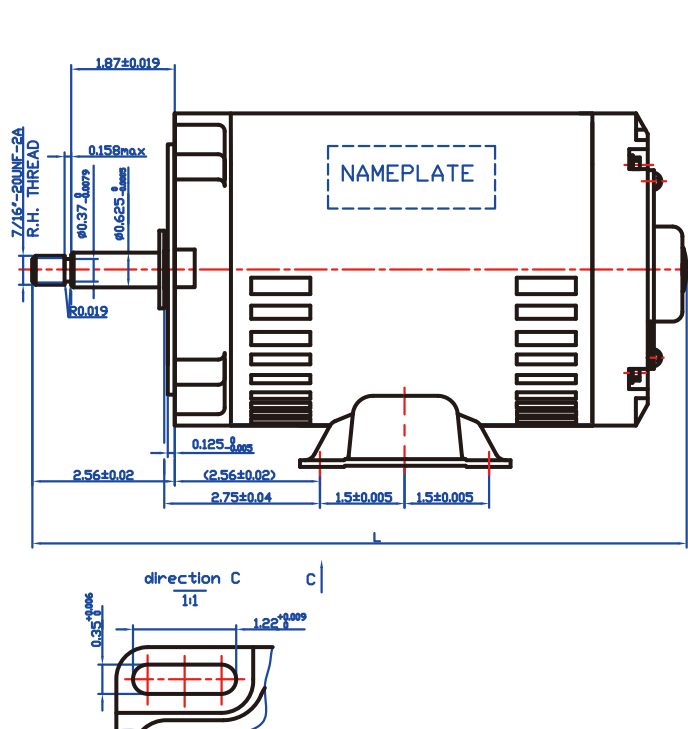


GW REF.NO.	HP	RPM	FRAME	VOLTAGE	Hz	FLA (230V)	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	L
YS4812D-J1H	1/2	3600	S56J	208-203/460	60	0.7	NONE	F	1.6	20	CONT.	12.5
YS4832D-J1H	3/4	3600	S56J	208-203/460	60	1.1	NONE	F	1.5	20	CONT.	13.3
YS4852D-J1H	1	3600	S56J	208-203/460	60	1.5	NONE	F	1.4	20	CONT.	13.8

外形和尺寸 LAYOUT & DIMENSIONS

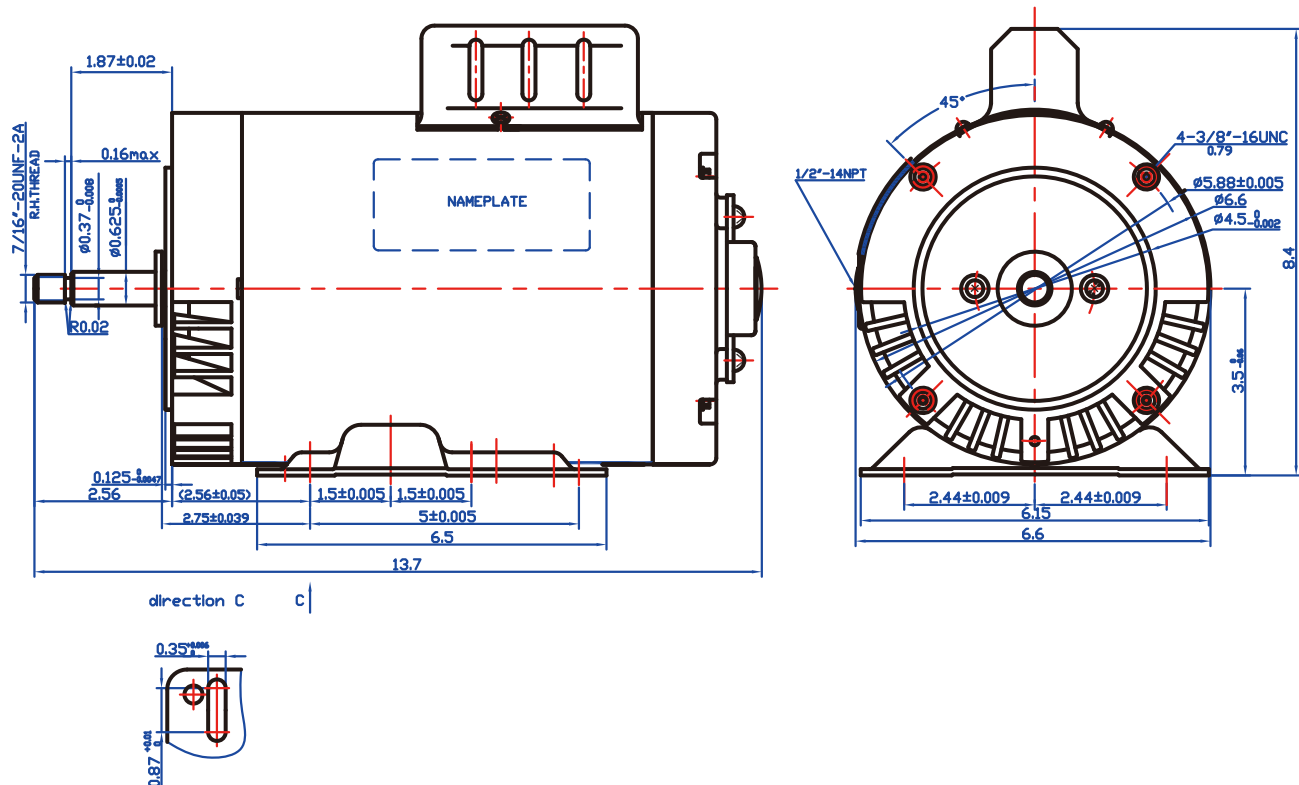


GW REF.NO.	HP	RPM	FRAME	VOLTAGE	Hz	PH	FLA (230V)	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	ENCLOSE	ROTATION
YCN5652D-J1H	1.5	3600	56J	115/208-230	60	1	8.2	AUTO.	F	1.3	20	CONT.	ODP	CWLE

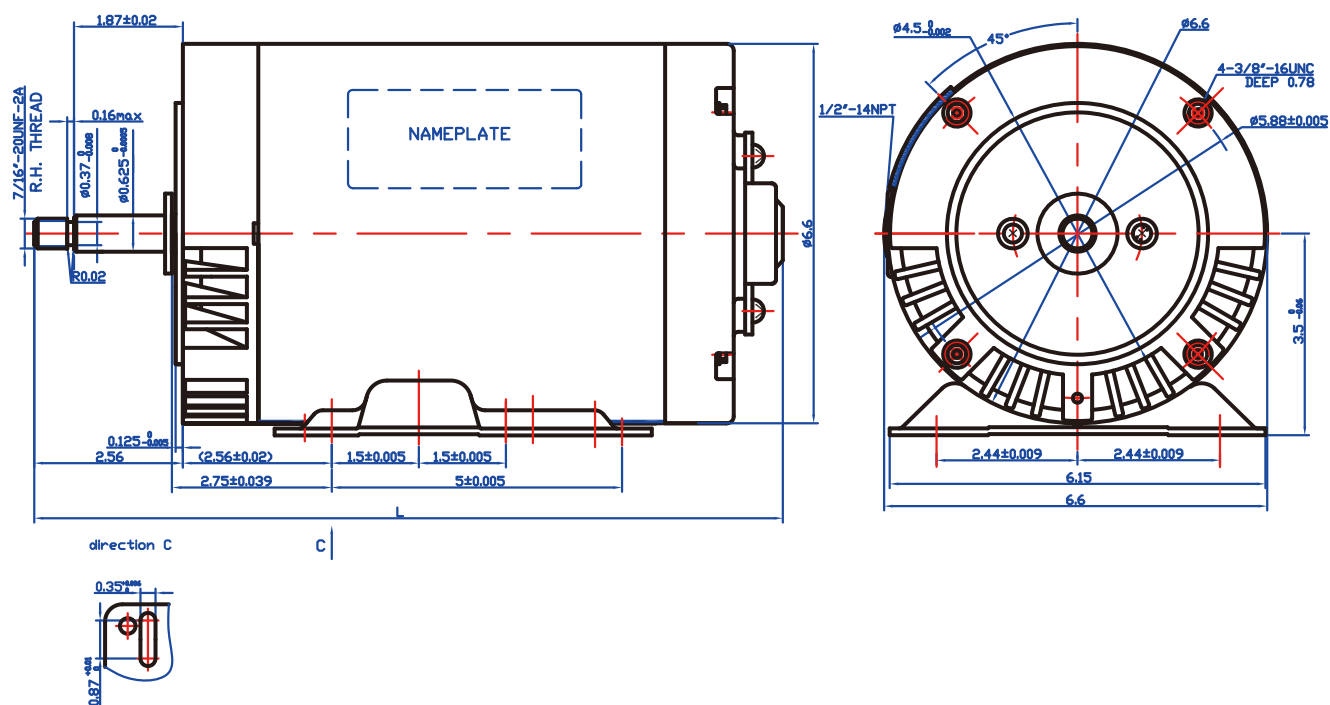

GW REF.NO.	HP	RPM	FRAME	VOLTAGE	Hz	PH	FLA (230V)	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	ENCLOSE	ROTATION	L
YSN5642D-J1H	1.5	3600	56J	208-230/460	60	3	2	NONE	F	1.3	20	CONT.	ODP	CWLE	13.0
YSN5652D-J1H	2	3600	56J	208-230/460	60	3	2.6	NONE	F	1.2	20	CONT.	ODP	CWLE	13.5
YSN5682D-J1H	3	3600	56J	208-230/460	60	3	3.8	NONE	F	1.15	20	CONT.	ODP	CWLE	14.5

外形和尺寸 LAYOUT & DIMENSIONS

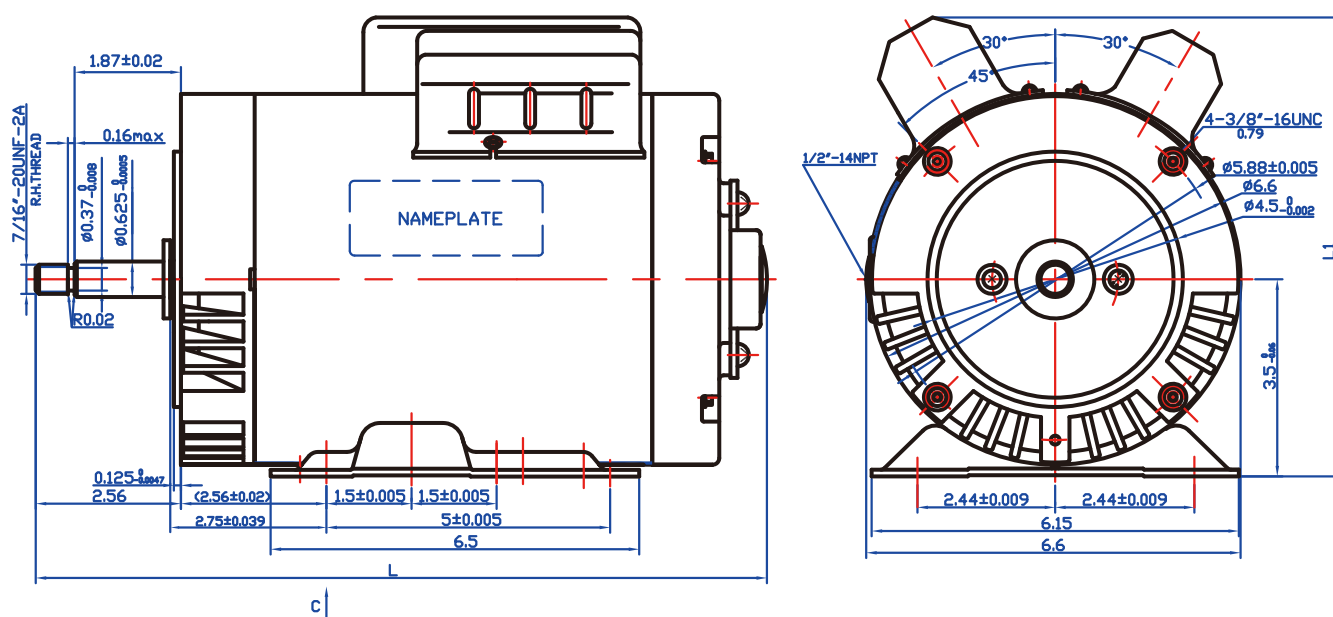

GW REF.NO.	HP	RPM	FRAME	VOLTAGE	Hz	PH	FLA (230V)	OVER. LOAD	INS. CLASS	S.F.	IP	DUTY	ENCLOSE	ROTATION	L	L1
YCYN5672D-J1H	2	3600	56J	115/208-230	60	1	8.6	NONE	F	1.2	20	CONT.	ODP	CWLE	14.8	8.5
YCYN5692D-J1H	3	3600	56J	115/208-230	60	1	11.8	NONE	F	1.15	20	CONT.	ODP	CWLE	15.8	8.9