




POND MOTORS

Features :

- NEMA 56Y/56J/56Y face mounting flange
- High starting torque
- Threaded shafts made of 304 SST




REF. NO.	HP	RPM	FRAME	VOLTAGE	PH	HZ	OVER. LOAD	INS.	S.F	DUTY	WGT LB/KG
YCYN5624-1GW	0.33	1725	56C	115	1	60	AUTO	F	1.15	CONT	12/26
YCYN5624-1GWS	0.33	1725	56Y	115	1	60	AUTO	F	1.15	CONT	12/26
YCYN5634-1GW	0.5	1725	56C	115	1	60	AUTO	F	1.15	CONT	13/29
YCN5652D-J1H	1.5	3450	56J	115/208-230	1	60	AUTO	F	1.3	CONT	14.5/32

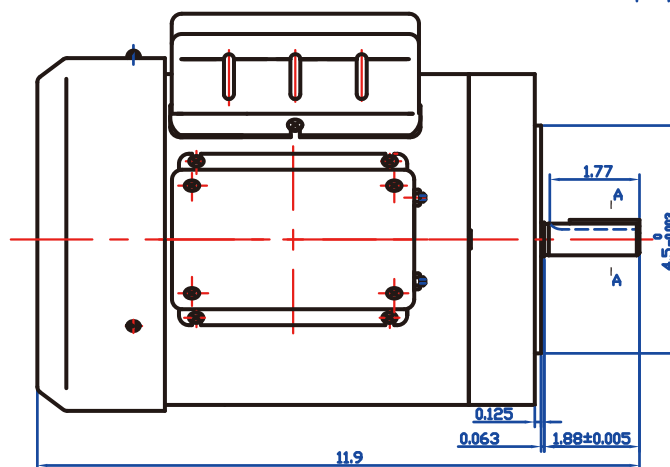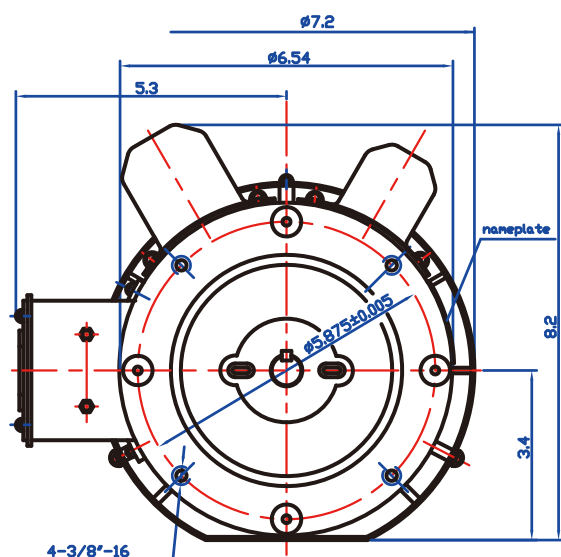


MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	thermal protector	S.F	DUTY
YCYN5624-1GW	56C	1	4	1/3	1725	60	115	AUTO.	1.15	CONT.
YCYN5634-1GW	56C	1	4	1/2	1725	60	115	AUTO.	1.15	CONT.

LAYOUT & DIMENSIONS

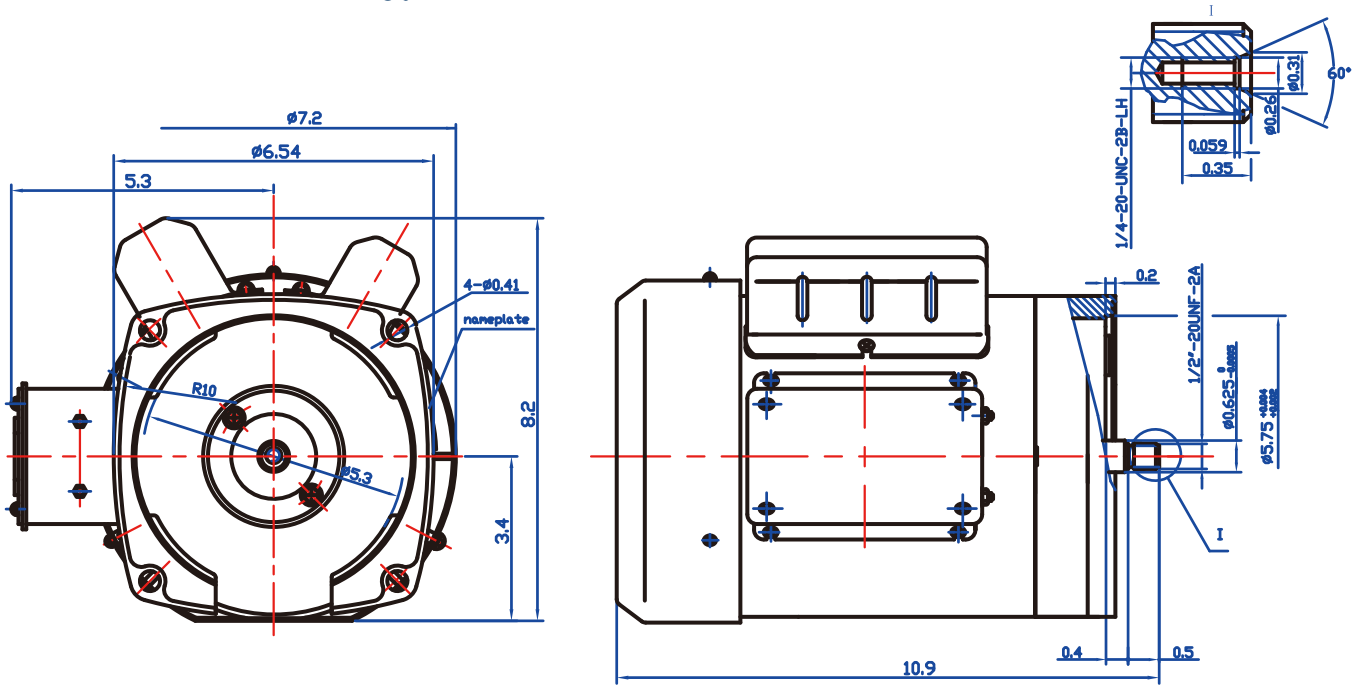


MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	thermal protector	S.F	DUTY
YCYN5624-1GWS	56Y	1	4	1/3	1725	60	115	AUTO.	1.15	CONT.

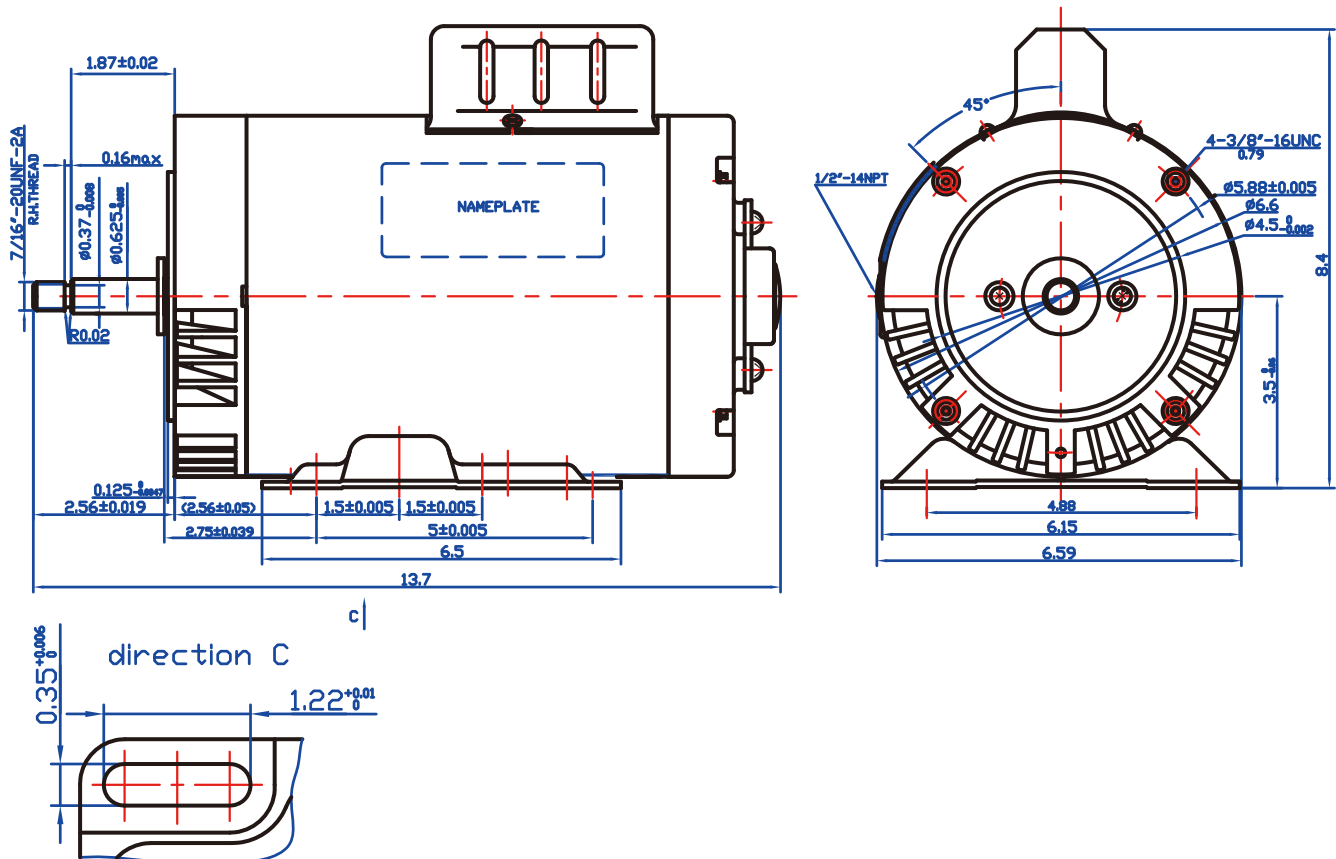

MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	SF	thermal protector
YCN5652D-J1H	56J	1	2	1.5	3450	60	115/208-230	1.3	AUTO

* The above data are for reference only and can be customized as required.

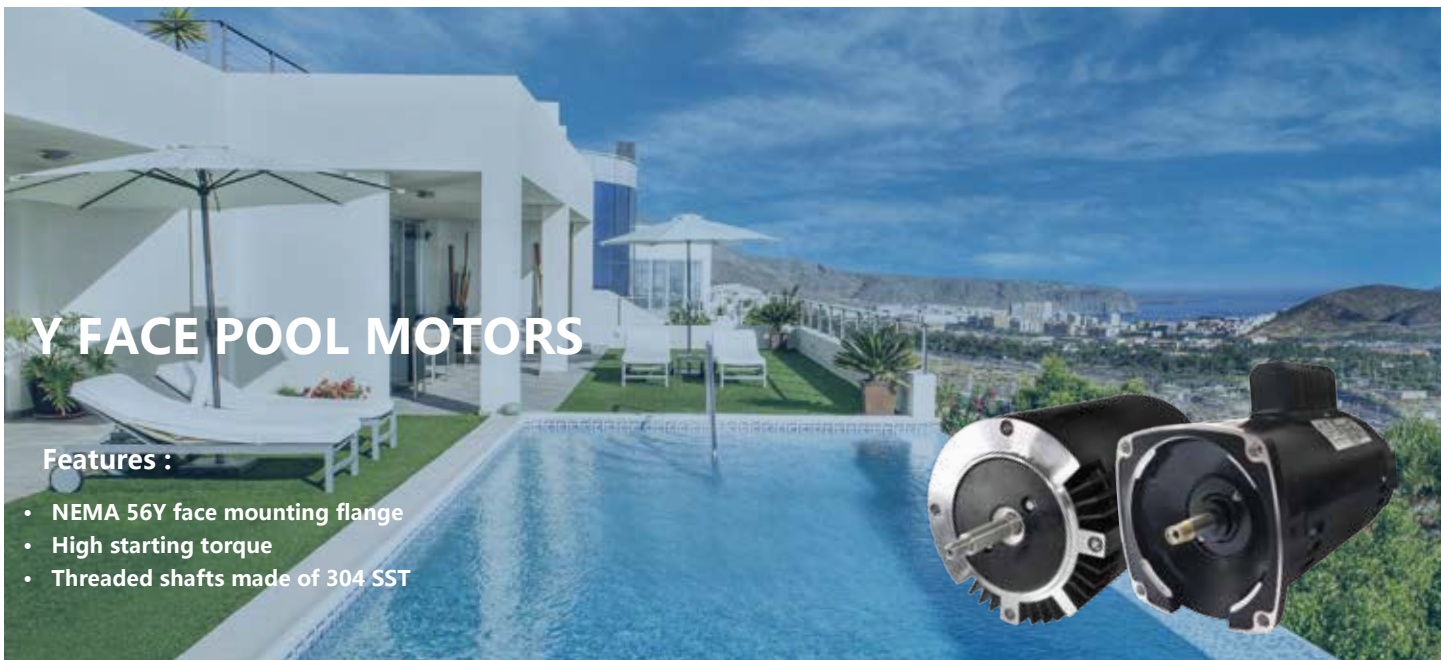


Y FACE POOL MOTORS

Features :

- NEMA 56Y face mounting flange
- High starting torque
- Threaded shafts made of 304 SST


- NEMA 56Y face mounting flange
- High starting torque
- Threaded shafts made of 304 SST

REF. NO.	HP	RPM	FRAME	VOLTAGE	PH	HZ	OVER- LOAD	INS.	S.F	DUTY	SPEED	WGT
YYN5652-L7	1	3600	56Y	115/208-230	1	60	AUTO	F	1.4	CONT	1	15/33
YYN5672-L7	1.5	3600	56Y	115/208-230	1	60	AUTO	F	1.3	CONT	1	18/40
YYN5682-L7	2	3600	56Y	208-230	1	60	AUTO	F	1.3	CONT	1	19/42
YYN5624O1	1.5	3450/1725	56Y	230	1	60	AUTO	F	1.3	CONT	2	18.6/41
YYN5682-L8	2.0	3450/1725	56Y	230	1	60	AUTO	F	1.3	CONT	2	19.6/43
YSN5672-L7	2/1.5	3600	56Y	208-230/460	3	60/50	AUTO	F	1.15	CONT	1	17.2/38
YSN5692-L7	3/2.0	3600	56Y	208-230/460	3	60/50	AUTO	F	1.15	CONT	1	20.5/45

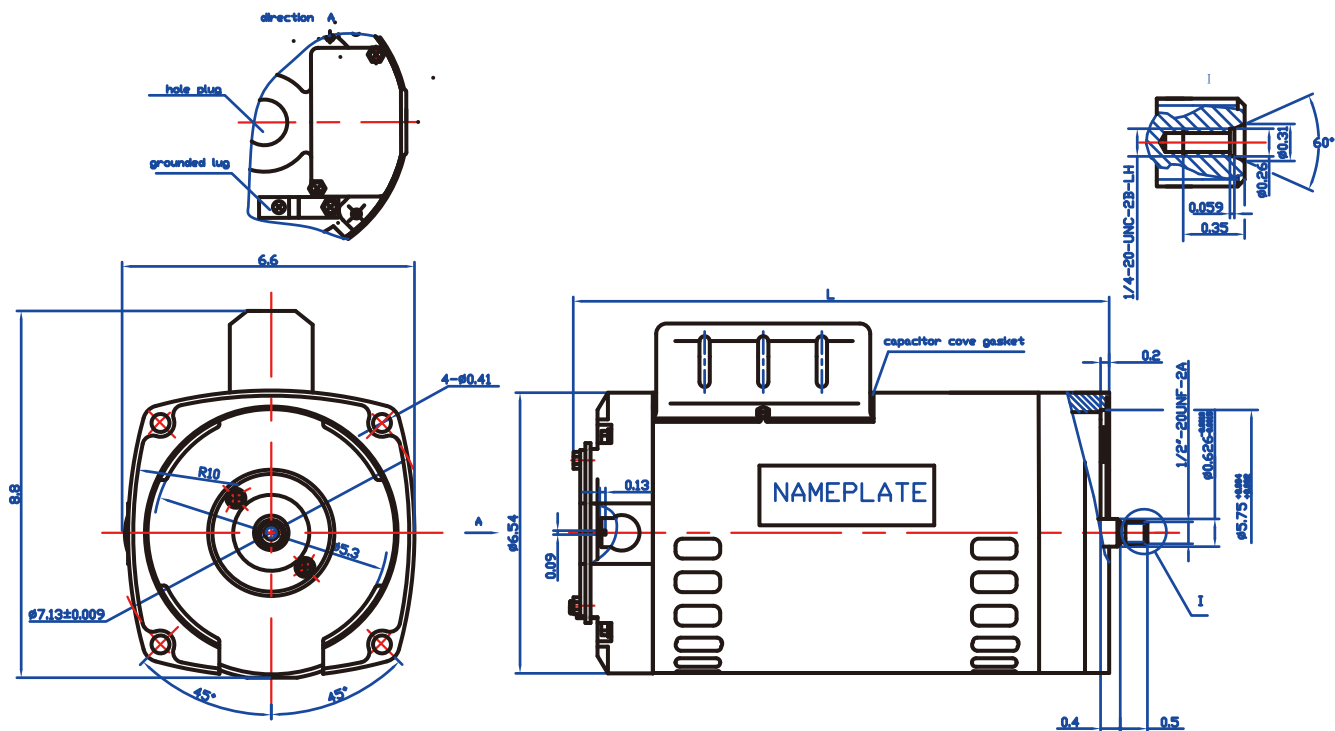


LAYOUT & DIMENSIONS

MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	SF	L	thermal protector
YYN5652-L7	56Y	1	2	1	3450	60	115/208-230	1.4	12.6	AUTO
YYN5672-L7	56Y	1	2	1.5	3450	60	115/208-230	1.3	13.5	AUTO
YYN5682-L7	56Y	1	2	2	3450	60	208-230	1.3	13.5	AUTO

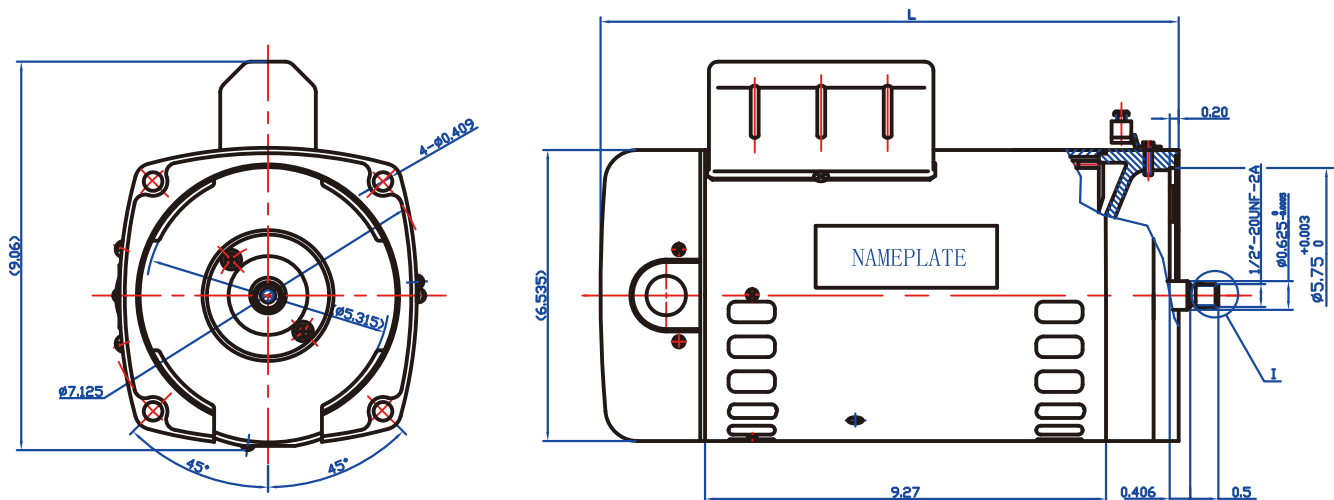


MODEL	FRAME	PH	HP	RPM	Hz	Volt	SF	L	Thermal Protection
YYN562401	56Y	1	1.5	3450/1725	60	230	1.3	12.7	AUTO
YYN5682-L8	56Y	1	2	3450/1725	60	230	1.3	13.19	AUTO

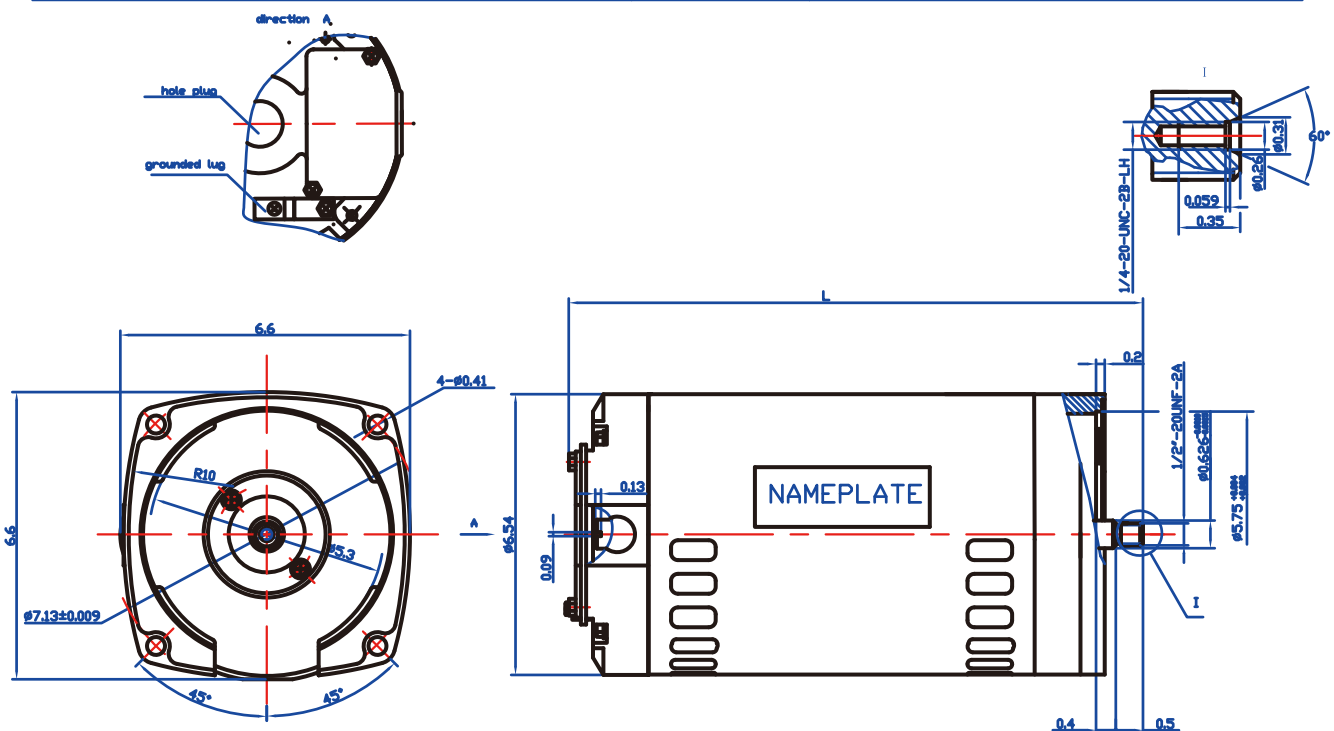

MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	SF	L	thermal protector	DUTY
YSN5672-L7	56Y	3	2	2,15	3490,2870	60,50	208-230/460,190/380	1.15	13.5	AUTO	CONT.
YSN5692-L7	56Y	3	2	3,2	3490,2870	60,50	208-230/460,190/380	1.15	14.3	AUTO	CONT.

* The above data are for reference only and can be customized as required.

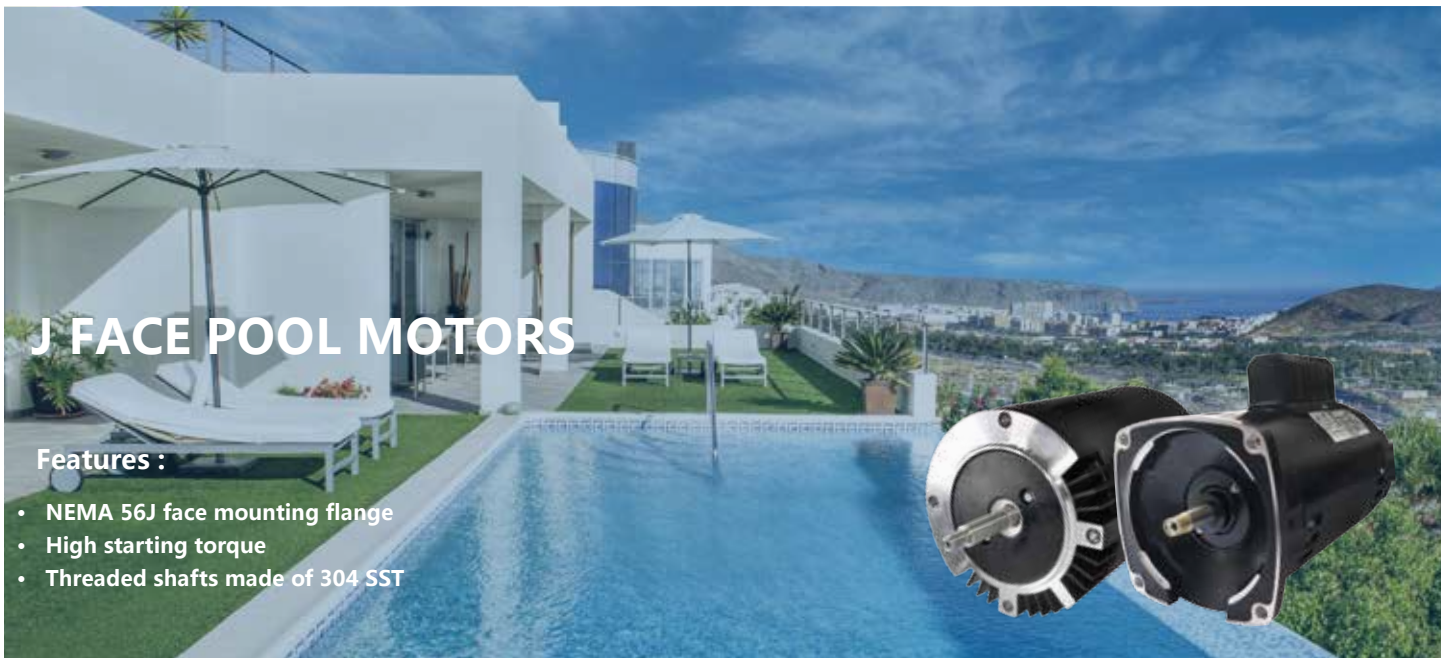


J FACE POOL MOTORS

Features :

- NEMA 56J face mounting flange
- High starting torque
- Threaded shafts made of 304 SST


- NEMA 56J face mounting flange
- High starting torque
- Threaded shafts made of 304 SST

GW REF. NO.	HP	RPM	FRAME	VOLTAGE	PH	HZ	OVER. LOAD	INS.	S.F	DUTY	WGT
YYN5652-L7C	1	3600	56J	115/208-230	1	60	AUTO	F	1.4	CONT	15/33
YYN5672-L7C	1.5	3600	56J	115/208-230	1	60	AUTO	F	1.3	CONT	18/18
YYN5682-L7C	2	3600	56J	208-230	1	60	AUTO	F	1.3	CONT	19/42
YCN5642K-JB	.75 BOOSTER	3450	56J MOD	115/230	1	60	AUTO	F	1.1	CONT	14/31

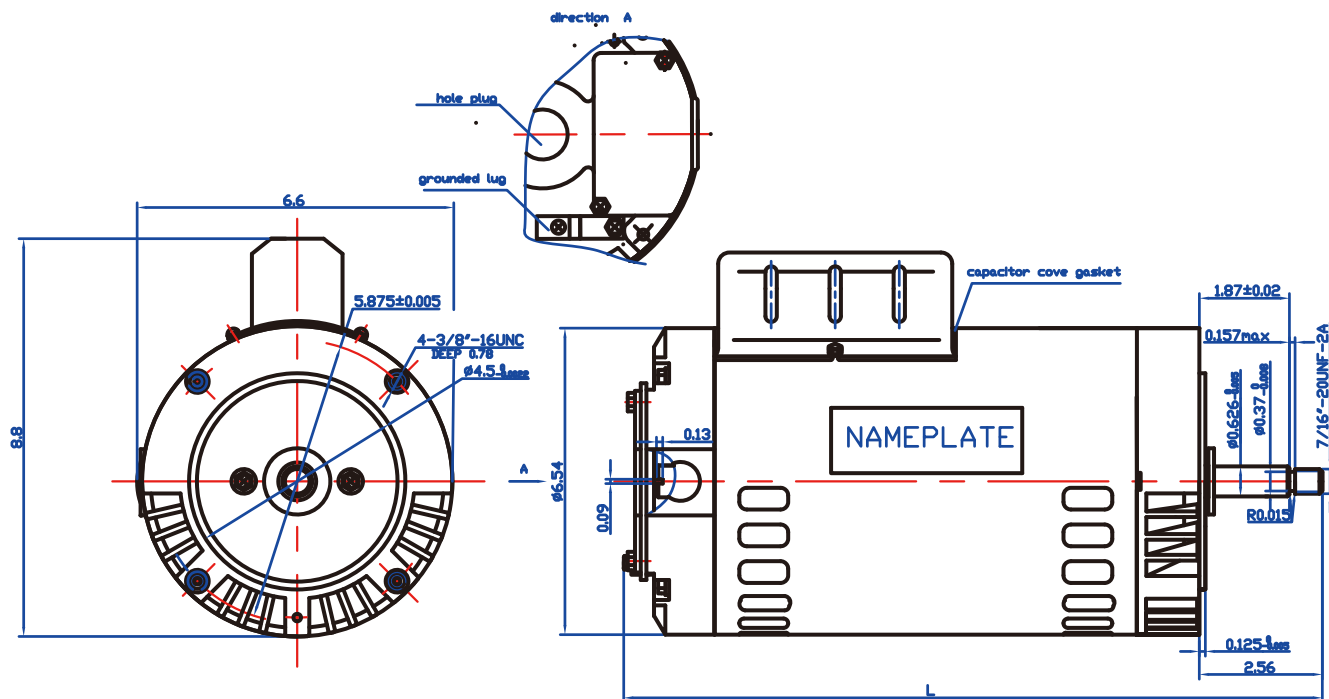

MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	SF	L	thermal protector	DUTY
YYN5652-L7C	56J	1	2	1	3450	60	115/208-230	1.4	14.1	AUTO	CONT.
YYN5672-L7C	56J	1	2	1.5	3450	60	115/208-230	1.3	15.1	AUTO	CONT.
YYN5682-L7C	56J	1	2	2	3450	60	208-230	1.3	15.1	AUTO	CONT.

LAYOUT & DIMENSIONS

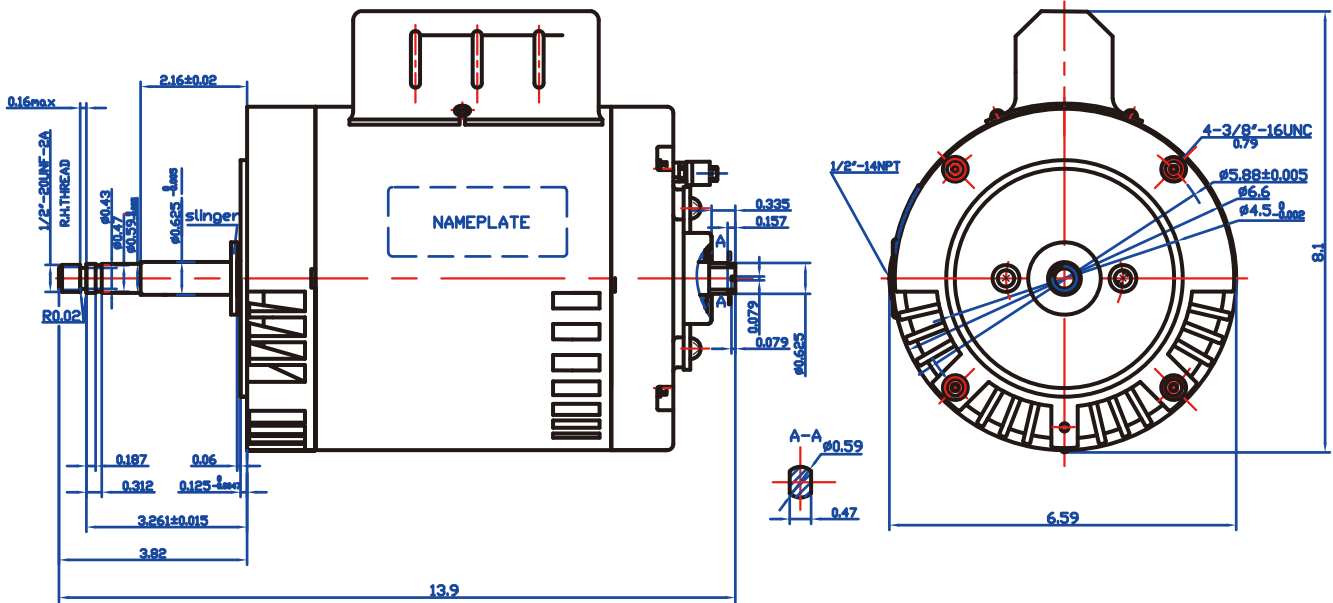

MODEL	FRAME	PH	Pole	HP	RPM	Hz	Volt	SF	thermal protector
YCN5642K-JB	56CZ	1	2	3/4	3450	60	115/230	1.5	AUTO

* The above data are for reference only and can be customized as required.