

农业风扇-皮带驱动-完全机座-顶部进气-刚性机座

AGRICULTURAL FAN - BELT DRIVE

TOTALLY ENCLOSED - AIR OVER - RIGID BASE

特点：

- 高效率
- "Legacy" 重载设计
- Torq® 离心开关
- 升级的密封性
- F级绝缘



Features :

- High Efficiency
- "Legacy" heavy duty design
- Torq® centrifugal and stationary switches
- Upgraded gasketing
- Class F insulation




型号	功率	转速	机座	电压	满负荷电流	过载保护	效率 (%)	过载系数	冷却方式	工作制	重量
REF. NO.	HP	RPM	FRAME	VOLTAGE	230V FLA	OVER. LOAD	FL EFF %	S.F.	ENCL.	DUTY	WGT LB/KG
YCYN5634T	0.5	1800	56	115/208-230	2.2	AUTO	80.6	1.0	TEAO	CONT.	28/12.7
YCYN5644T	0.75	1800	56H	115/208-230	3.4	AUTO	82.0	1.0	TEAO	CONT.	30/13.6
YCYN5654	1	1800	56H	115/208-230	4.3	AUTO	85.0	1.0	TEAO	CONT.	37/16.8
YCYN5664T	1.5	1800	56H	115/208-230	6.8	AUTO	78.0	1.0	TEAO	CONT.	39/17.7
YCYN5694D-2A	2	1800	145T	230	9.5	AUTO	83.0	1.0	TEAO	CONT.	50/22.7

外形和尺寸 LAYOUT & DIMENSIONS

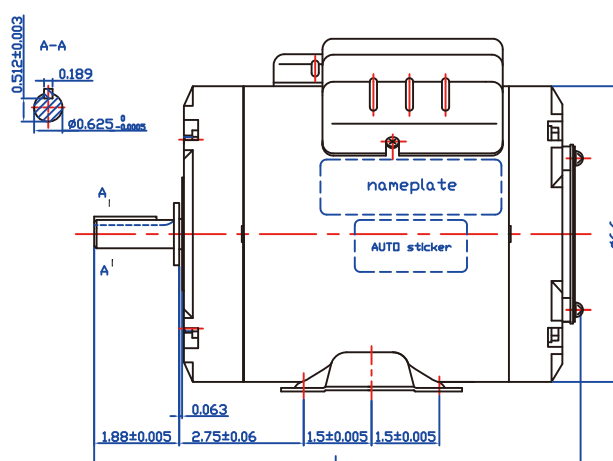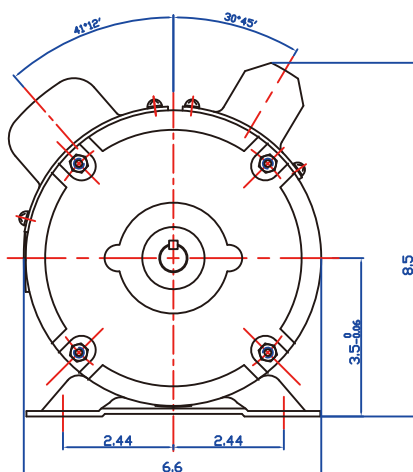


SMC MODEL	GW MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector	L
YCYN5634T	N56B05L18D10AA	56	1	1/2	60	115/230	1800	AUTO.	10.5
YCYN5644T	N56B75L18D10AA	56	1	3/4	60	115/230	1800	AUTO.	10.9

外形和尺寸 LAYOUT & DIMENSIONS

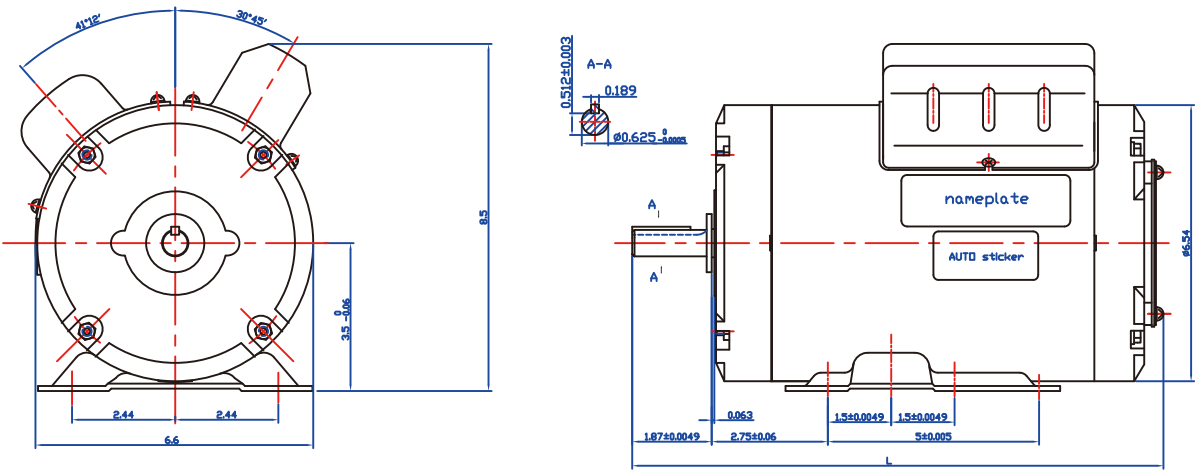

SMC MODEL	GW MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector	L
YCYN5654	N56H10L18D10AA	56	1	1	60	115/230	1800	AUTO.	11.8
YCYN5664T	N56H15L18D10AA	56	1	1.5	60	115/230	1800	AUTO.	12.6

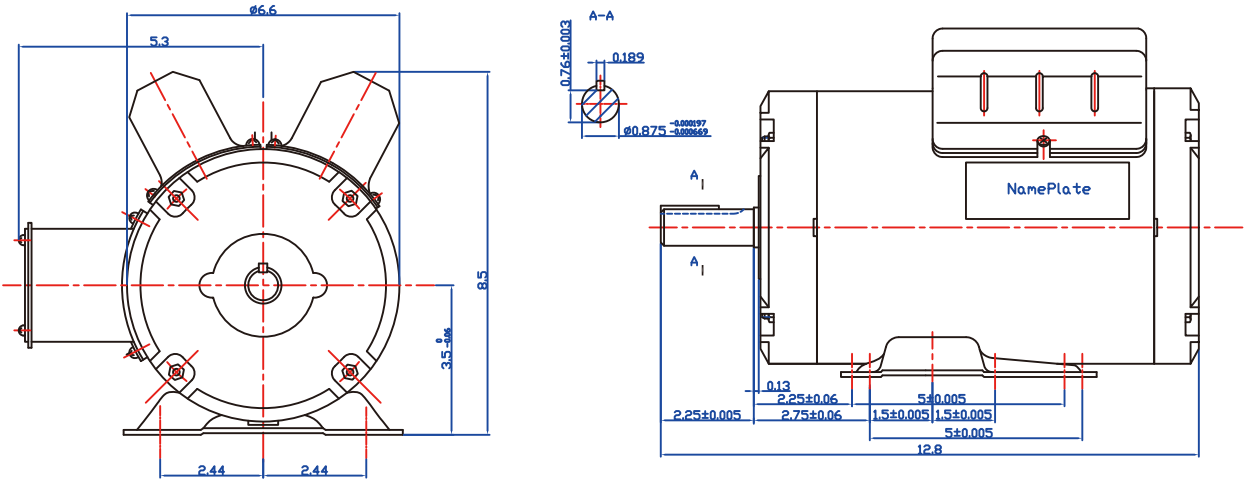

SMC MODEL	GW MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector
YCYN5694D-2A	145TH20L18H10AA	145T	1	2	60	230	1800	AUTO.

*以上数据仅供参考，可根据要求定制。