

高性能农用风扇电机-全封闭-电容运行 AGRICULTURAL FAN MOTORS - TEAO -PSC High Performance

特点：

- 隔离防水保护引出线、自动温控保护器及电容器
- 锁紧式双面密封轴可满足所有角度安装
- 精密平衡转子
- 驱动端有油封


Features :

- Benchmark variable speed performance - OEM replacement
- Water-tight compartment houses wiring, auto thermal, and capacitor
- Locked, double sealed bearings for all angle mounting
- Precision balanced rotor




型号	功率	转速	机座	电压	满负荷电流	过载保护	绝缘等级	过载系数	冷却方式	工作制	重量
REF. NO.	HP	RPM	FRAME	VOLTAGE	230V FLA	OVER. LOAD	INS.	S.F.	ENCL	DUTY	WGT LB/KG
YYA4814S-1D	0.25	1625	48	115/230	1.3	AUTO	F	1.0	TENV	CONT.	18/8.2
YY4814S-1	0.25	1625	48	115/230	1.3	AUTO	F	1.0	TENV	CONT.	18/8.2
YYA4816S-1D	0.25	1060	48	115/230	1.3	AUTO	F	1.0	TENV	CONT.	21/9.5
YYA4824S-1D	0.33	1625	48	115/230	1.8	AUTO	F	1.0	TENV	CONT.	19/8.6
YY4824S-1	0.33	1625	48	115/230	1.8	AUTO	F	1.0	TENV	CONT.	19/8.6
YYA4826S-1D	0.33	1075	48	115/230	1.9	AUTO	F	1.0	TENV	CONT.	22/10.0
YYA4834S-1D	0.50	1625	48	115/230	2.6	AUTO	F	1.0	TENV	CONT.	22/10.0
YY4834S-1	0.50	1625	48	115/230	2.6	AUTO	F	1.0	TENV	CONT.	22/10.0
YYA4836S-1D	0.50	1060	48	115/230	2.8	AUTO	F	1.0	TENV	CONT.	25/11.4

外形和尺寸 LAYOUT & DIMENSIONS

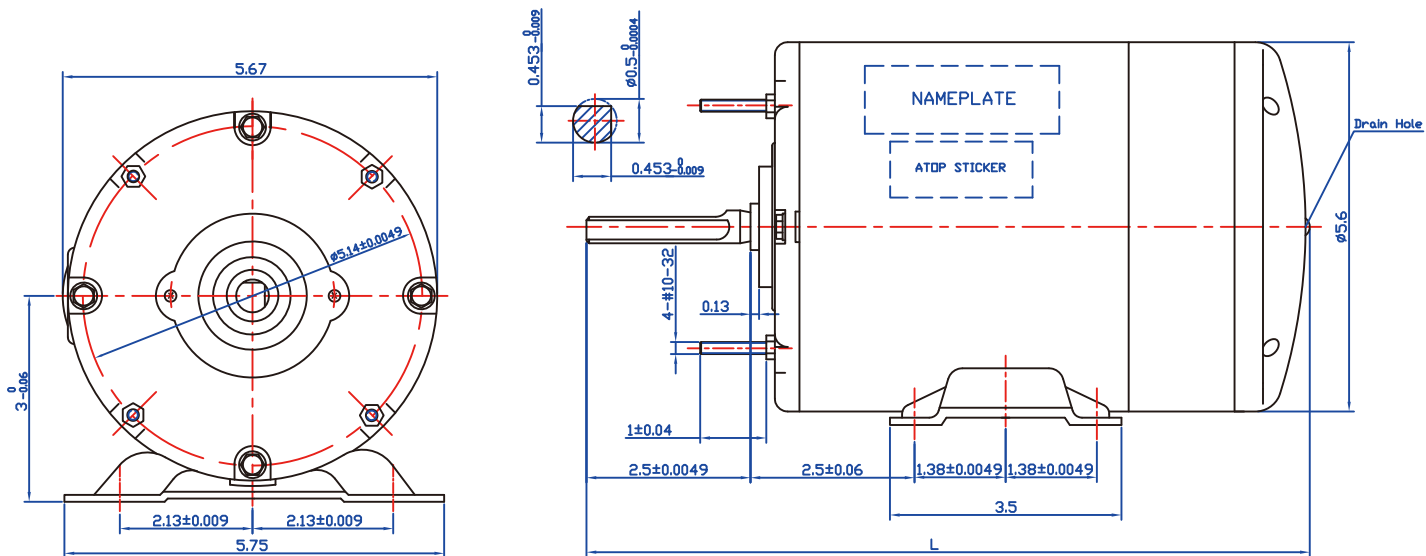

SMC MODEL	GW MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector	C
YY4814S-1D	N48BE25Y18D10AA42	48	1	1/4	60	115/230	1800	AUTO.	11.3
YY4824S-1D	N48BE33Y18D10AA42	48	1	1/3	60	115/230	1800	AUTO.	11.3
YY4834S-1D	N48BE05Y18D10AA	48	1	1/2	60	115/230	1800	AUTO.	11.7
YY4816S-1D	N48BE25Y12D10AA	48	1	1/4	60	115/230	1200	AUTO.	11.2
YY4826S-1D	N48BE33Y12D10AA21	48	1	1/3	60	115/230	1200	AUTO.	11.7
YY4836S-1D	N48BE05Y12D10AA	48	1	1/2	60	115/230	1200	AUTO.	12.2

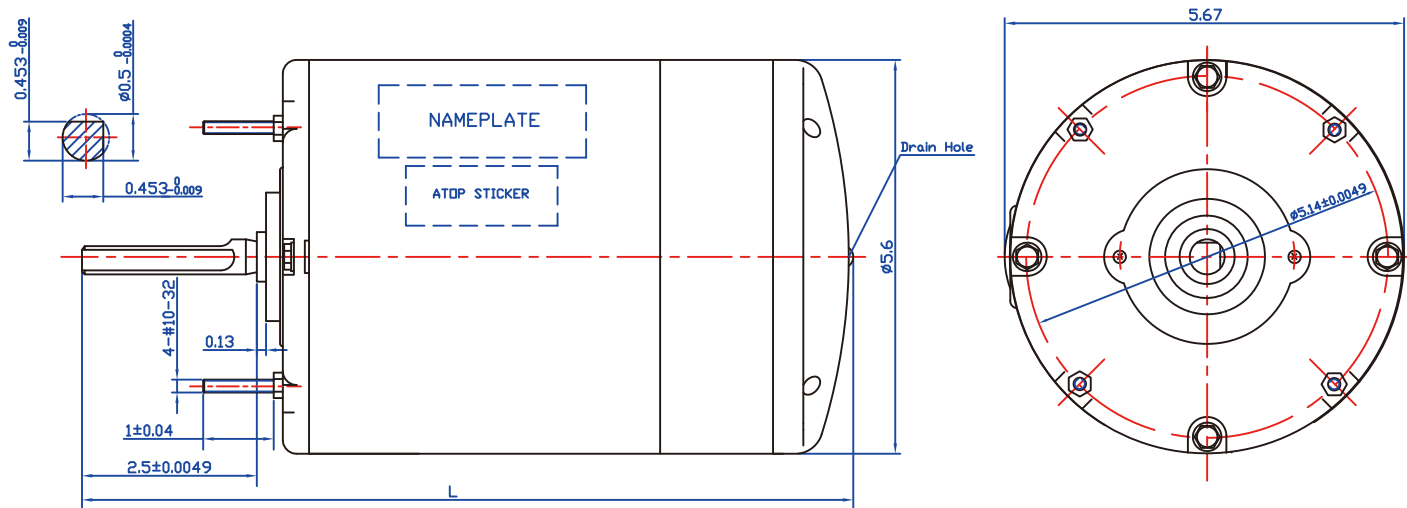

SMC MODEL	GW MODEL	FRAME	PH	HP	Hz	Volt	RPM	thermal protector	L
YY4814S-1	N48E25Y18D10AA41	48	1	1/4	60	115/230	1800	AUTO.	11.3
YY4824S-1	N48E33Y18D10AA41	48	1	1/3	60	115/230	1800	AUTO.	11.3
YY4834S-1	N48E05Y18D10AA	48	1	1/2	60	115/230	1800	AUTO.	11.7